

Tel : +86-755-29197332

Fax : +86-755-29197301

E-mail : info@upshine.com

Web : www.upshine.com


Add : 2-5 floor, 2nd building, runheng industrial zone, fuyuan 1st road
(west side), FuYong Sub-district, Bao'an, Shenzhen China


Up-shine Lighting Co., Limited



LED PANEL LIGHT SERIES

PRODUCT
COLLECTION

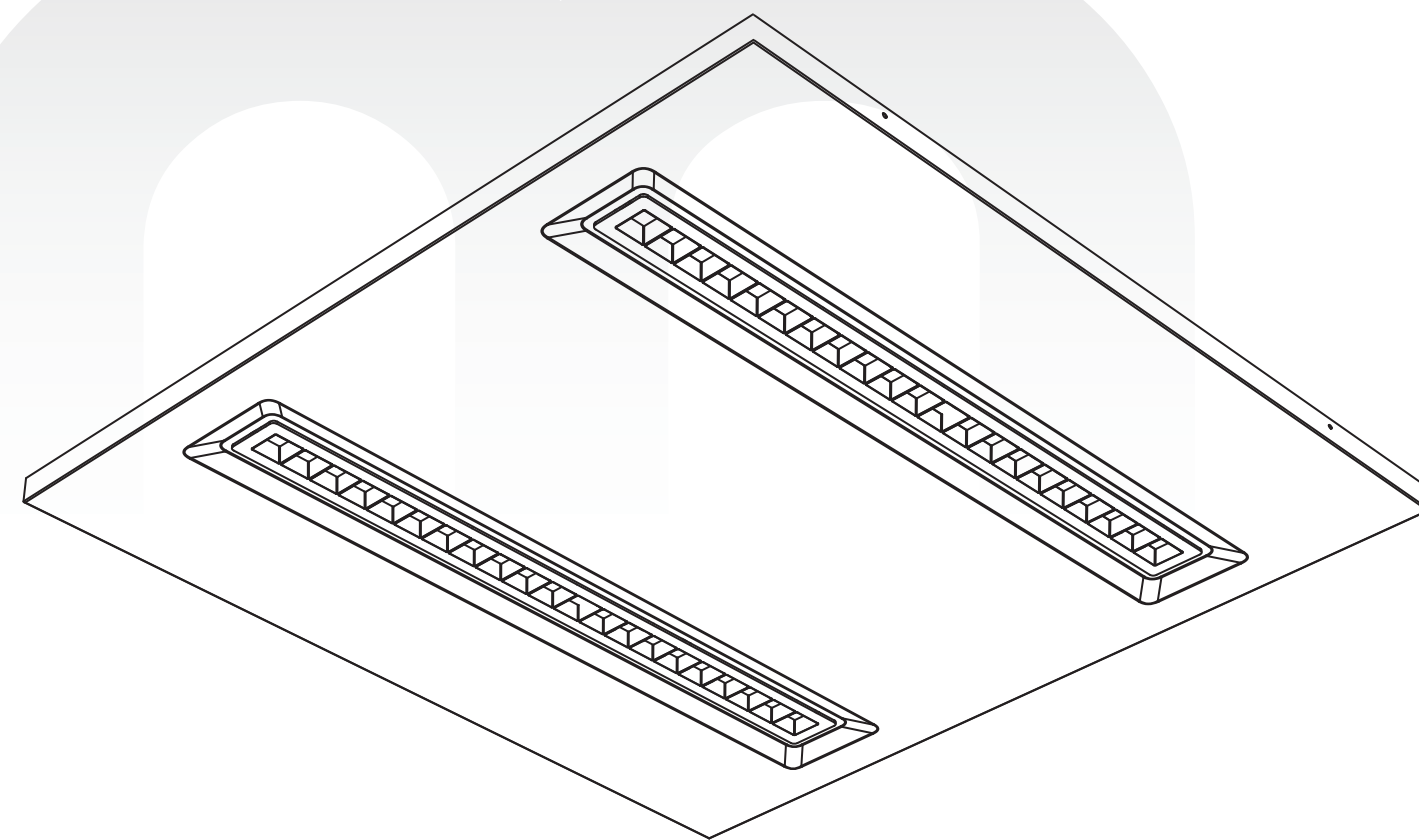

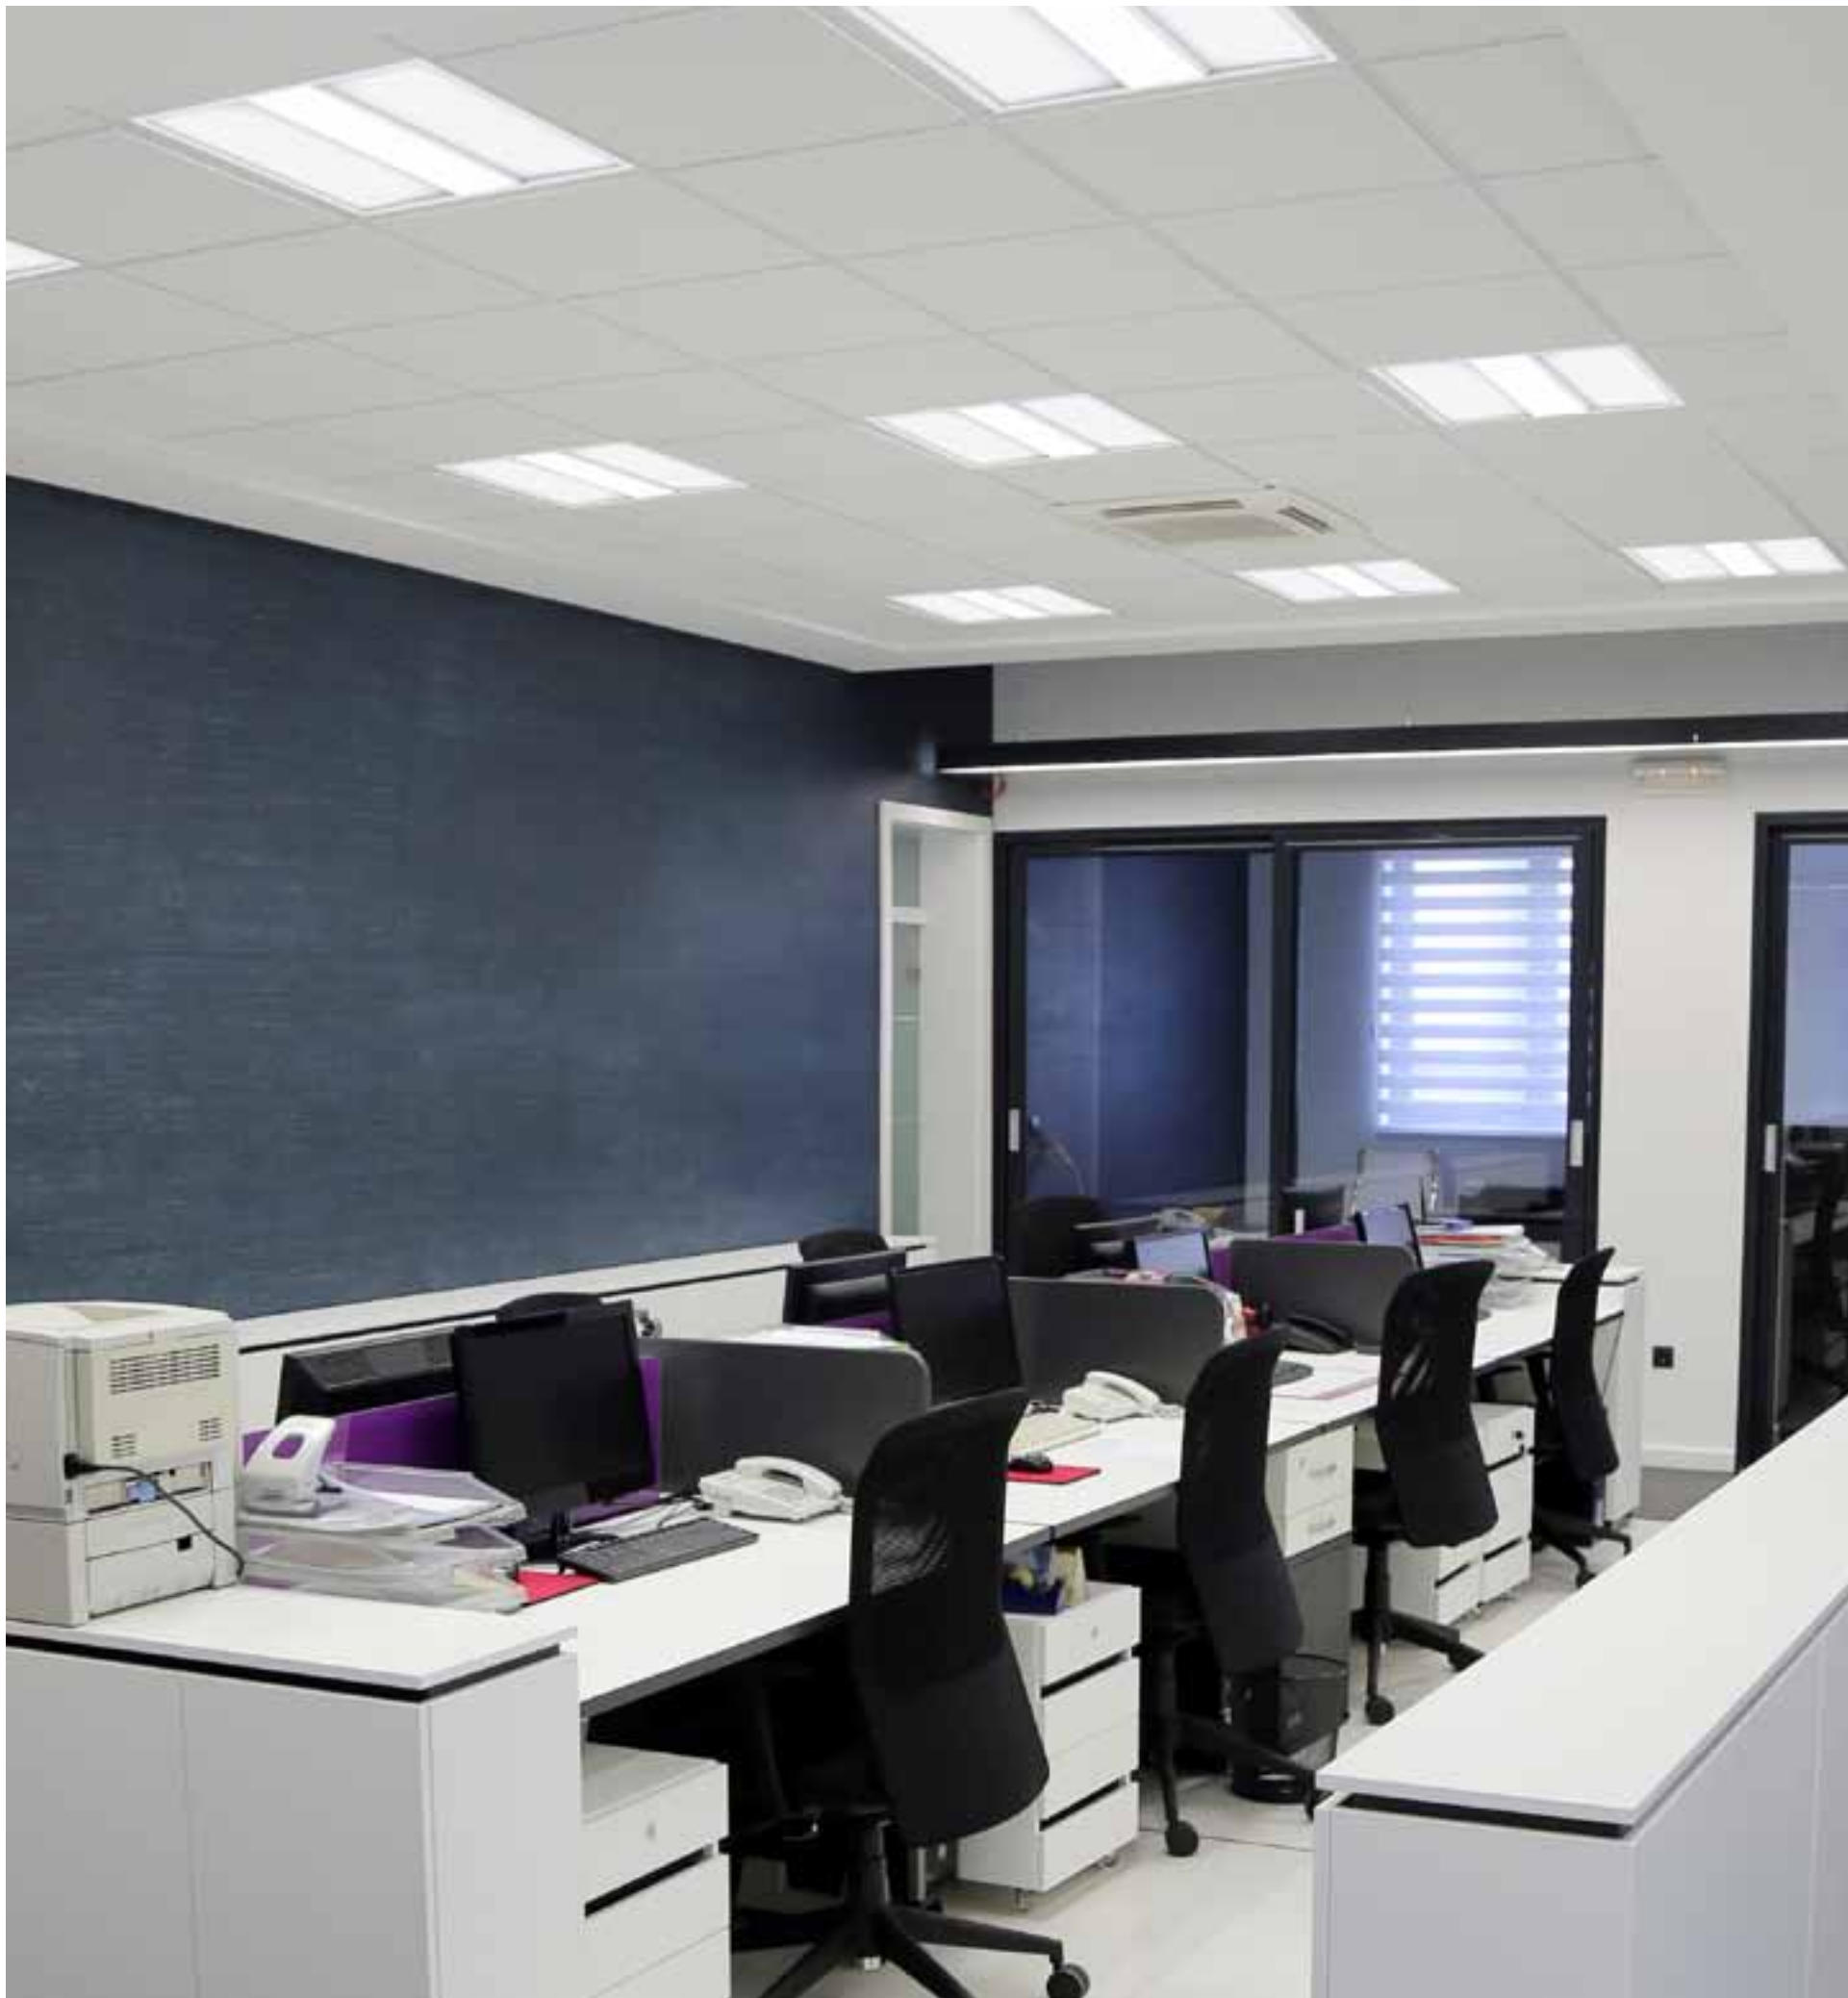


LED Panel Light

/Series/

LED panel light is one of the most popular luminaire for commercial lighting, with continuous modification of its design, light efficiency, CRI, UGR and smart function, UPSHINE Lighting is always capable of providing customers with helpful solution and best price, that's the main reason UPSHINE Lighting is preferred supplier of LED panel lamp in the market. UPSHINE LED panel family supply different solution for project and distribution, such as regular LED panel with high Lumen and low UGR, CCT changing LED panel, waterproof led panel, frameless led panel, Up/down emitting led panel, big size round led panel with recessed / surface mounted / pendant installation, TUV-CE approved Upshine driver and Lifud, Tridonic, Philips driver ensure our reputation of quality always.

GL-P Panel light



GL-P panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC + ABS module form ideal combination of stylish design, it is a perfect replacement for traditional grill lamp.

IP40

UGR<19

DIM

DALI

0-10V

AC 220-240V

PF≥0.9

CRI≥80


SAA

RoHS

CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-35W-P	35W	595x595x23.5	555x555	3995lm	3.50	4PCS
GL6262-35W-P	35W	620x620x23.5	580x580	4090lm	3.65	4PCS
GL30120-35W-P	35W	295x1195x23.5	255x1155	3995lm	3.55	4PCS
GL60120-60W-P	60W	595*1195*23.5	555x1155	6600lm	6.80	2PCS

PL-AZ Panel light



PL-AZ panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC module form ideal combination of stylish design, the luminous module can be replaced, which ensure the easy maintenance.it is a ideal replacement for traditional 3*24W HO T5 and 3*18W T8 fluorescent louver luminaries and side lit LED panel light.

IP20

UGR<19

DIM

DALI

0-10V

TUNABLE WHITE

SLIDE SWITCH 3 in 1

AC 220-240V

PF≥0.9

CRI≥80


SAA

RoHS


CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-30W-AZ	30W	595x595x15	580x580	3450lm	3.20	4PCS
PL6060-35W-AZ	35W	595x595x15	580x580	3950lm	3.20	4PCS
PL6262-30W-AZ	30W	620x620x15	605x605	3450lm	3.50	4PCS
PL6262-35W-AZ	35W	620x620x15	605x605	3950lm	3.50	4PCS
PL30120-30W-AZ	30W	1195x295x17.5	1180x280	3450lm	3.60	4PCS
PL30120-35W-AZ	35W	1195x295x17.5	1180x280	3950lm	3.60	4PCS

PL-AK Panel light



PL-AK panel light is a module design with external driver, featuring PC louver reflectors to help reduce UGR, offers the ideal combination of stylish design and optimum performance for both task and general lighting; Module replaceable, easy to install and maintain.Available in various installation ways: recessed, suspended and surface mounted, and can replace the traditional panel light.

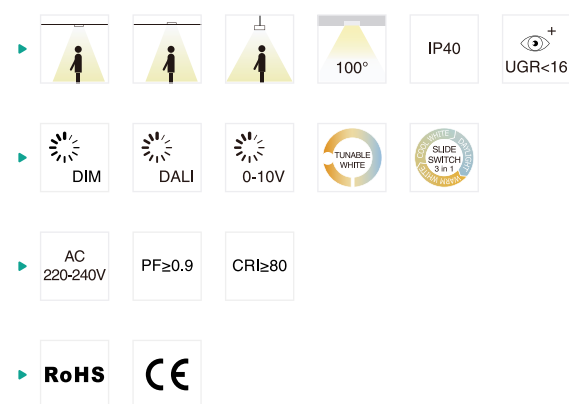


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-18W-AK	18W	595x295x36	580x280	2010lm	1.55	4PCS
PL6060-25W-AK	25W	595x595x36	580x580	3552lm	2.90	4PCS
PL6060-30W-AK	30W	595x595x36	580x580	3660lm	2.90	4PCS
PL6060-36W-AK	36W	595x595x36	580x580	3900lm	2.90	4PCS
PL6262-36W-AK	36W	620x620x36	605x605	3900lm	3.30	4PCS
PL30120-36W-AK	36W	1195x295x36	1180x280	3920lm	2.95	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

PL008 Panel light

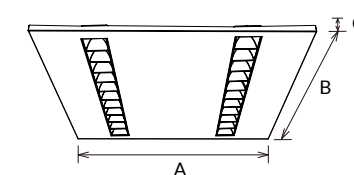

PL008 panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, CCT switchable is avalable, it is a ideal replacement for traditional 3*24W HO T5 and 3*18W T8 fluorescent louver luminaries and side lit LED panel light.




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL008-3060	15W	295x595x32	270x570	1800lm	2.00	5PCS
PL008-6060	30W	595x595x32	570x570	3600lm	3.20	5PCS
PL008-30120	30W	295x1195x32	270x1170	3600lm	3.60	5PCS
PL008-60120	60W	595x1195x32	570x1170	7200lm	6.00	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

PL-CL Panel light



PL-CL LED panel light is a screwless design with flat frame and no back plate, adopting PMMA LGP which produces uniform light and high lumen output, good quality SMD with 110lm/W. Triac dim, 0-10V dimmable, DALI dimmable and 3 CCT interchangeable are available. It can fits seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.

120°

IP20

UGR<19

DIM

DALI

0-10V

SLIDE SWITCH 3 in 1

AC 200-240V

PF≥0.9

CRI≥80

RoHS

CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-18W-CL	18W	295x295x9	280x280	1850lm	0.56	10PCS
PL3060-20W-CL	20W	295x595x9	280x280	2100lm	0.95	5PCS
PL6060-30W-CL	30W	595x595x9	580x580	3650lm	1.60	5PCS
PL6262-30W-CL	30W	620x620x9	605x605	3650lm	1.75	5PCS
PL30120-30W-CL	30W	1195x295x9	1180x280	3600lm	1.70	5PCS
PL6060-36W-CL	36W	595x595x9	580x580	4000lm	1.60	5PCS
PL6262-36W-CL	36W	620x620x9	605x605	4000lm	1.75	5PCS
PL30120-36W-CL	36W	1195x295x9	1180x280	3900lm	1.70	5PCS

CCT

3000K

4000K

5000K


5700K

Finish


White



PL-CB Panel light



PL-CB panel light is a 9mm thickness panel with external driver; PMMA LGP produce uniform light and high lumen output; Adopts high lumen SMD with CRI>80, 100lm/W, 130lm/W, SDCM<3 solution can be provided, Triac dim, 0-10V dimmable, DALI dimmable, Emergency all available. It can fit seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.

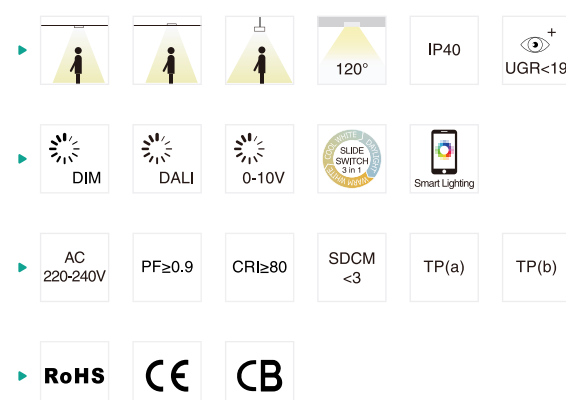


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-18W-CB	18W	295x295x9	280x280	100LM/W	0.85	5PCS
PL3060-20W-CB	20W	595x295x9	580x280	100LM/W	1.35	5PCS
PL30120-33W-CB	33W	1195x295x9	1180x280	100LM/W	2.40	5PCS
PL30120-42W-CB	42W	1195x295x9	1180x280	100LM/W	2.40	5PCS
PL6060-33W-CB	33W	595x595x9	580x580	100LM/W	2.35	5PCS
PL6060-42W-CB	42W	595x595x9	580x580	100LM/W	2.35	5PCS
PL60120-60W-CB	60W	1195x595x9	1180x580	100LM/W	5.30	2PCS
PL6262-33W-CB	33W	620x620x9	605x605	100LM/W	2.55	5PCS
PL6262-42W-CB	42W	620x620x9	605x605	100LM/W	2.55	5PCS
PL6060-25W-CB	25W	595x595x9	580x580	130LM/W	2.35	5PCS
PL6262-25W-CB	25W	620x620x9	605x605	130LM/W	2.55	5PCS
PL30120-25W-CB	25W	1195x295x9	1180x280	130LM/W	2.40	5PCS
PL60120-45W-CB	45W	1195x595x9	1180x580	130LM/W	5.30	2PCS


CCT 3000K 4000K 5000K 5700K

Finish White

PL-DS Panel light



PL-DS panel adopts upper and lower frame structure design to reach an IP65 waterproof effect, it has a strong structure with 10mm thickness. Upper and lower 6063 Aluminium frames provide a great thermal management to ensure a long lifespan. Besides, it has high lumen SMD light source and PMMA LGP which offer a uniform light output and avoid yellow risky. External IP65 flicker free driver with waterproof DC connector UGR<19 available. Multiple installation ways: recessed, suspended and surface mounted.

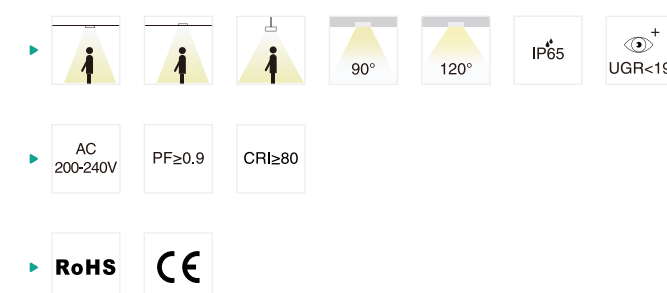


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-15W-DS	15W	295x295x10	280x280	1275lm	1.05	10PCS
PL3060-20W-DS	20W	595x295x10	580x280	1800lm	1.79	5PCS
PL6060-36W-DS	36W	595x595x10	580x580	3600lm	3.16	4PCS
PL6262-36W-DS	36W	620x620x10	605x605	3600lm	3.43	4PCS
PL30120-36W-DS	36W	1195x295x10	1180x280	3600lm	3.31	4PCS
PL60120-60W-DS	60W	1195x595x10	1180x580	6300lm	6.37	2PCS
PL3030-10W-DS (UGR<19)	10W	295x295x10	280x280	950lm	1.05	10PCS
PL3060-15W-DS (UGR<19)	15W	595x295x10	580x280	1575lm	1.79	5PCS
PL6060-36W-DS (UGR<19)	36W	595x595x10	580x580	3960lm	3.16	4PCS
PL6262-36W-DS (UGR<19)	36W	620x620x10	605x605	3960lm	3.43	4PCS
PL30120-36W-DS (UGR<19)	36W	1195x295x10	1180x280	3960lm	3.31	4PCS


CCT 3000K 4000K 5000K 5700K

Finish White

PL-CK Backlit panel light



PL-CK LED panel is a direct lighting with external driver, adopts SMD led with optical lens to provide a uniform light effect, no LGP design makes this panel more cost effective compared with normal edge-lit panel light, UGR<19 available, high efficiency available with 100lm/W, 120lm/W and 140lm/W. Recessed, suspended and surface mounted installation ways for choice.

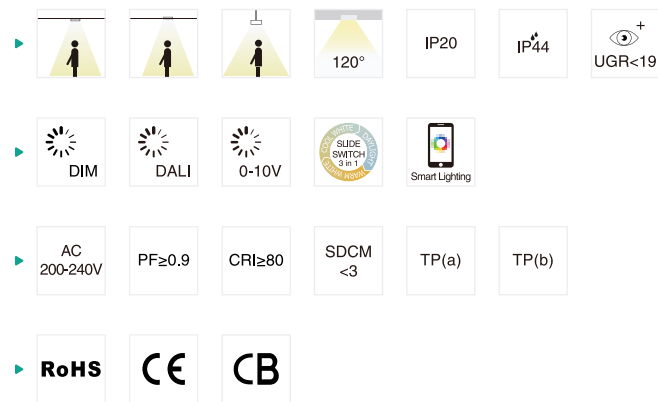

CCT 3000K 4000K 5000K 5700K

Finish White


PL-CK Backlit panel light




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-CK	10W	295x295x32	280x280	100LM/W	0.65	10PCS/10PCS
PL3060-16W-CK	16W	595x295x32	580x280	100LM/W	1.01	5PCS/6PCS
PL6060-36W-CK	36W	595x595x32	580x580	100LM/W	1.56	5PCS/6PCS
PL6262-36W-CK	36W	620x620x32	605x605	100LM/W	1.98	5PCS/6PCS
PL30120-36W-CK	36W	1195x295x32	1180x280	100LM/W	1.72	5PCS/6PCS
PL60120-60W-CK	60W	1195x595x32	1180x580	100LM/W	3.20	4PCS/4PCS
PL3060-16W-CK	16W	595x295x32	580x280	120LM/W (110LM/W UGR<19)	1.01 1.17	5PCS/6PCS
PL6060-30W-CK	30W	595x595x32	580x580	120LM/W (110LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-30W-CK	30W	620x620x32	605x605	120LM/W (110LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-30W-CK	30W	1195x295x32	1180x280	120LM/W (110LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL6060-36W-CK	36W	595x595x32	580x580	120LM/W	1.56	5PCS/6PCS
PL6262-36W-CK	36W	620x620x32	605x605	120LM/W (110LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-36W-CK	36W	1195x295x32	1180x280	120LM/W	1.72	5PCS/6PCS
PL60120-50W-CK	50W	1195x595x32	1180x580	120LM/W (110LM/W UGR<19)	3.20 3.90	4PCS
PL60120-60W-CK	60W	1195x595x32	1180x580	120LM/W (110LM/W UGR<19)	3.20 3.90	4PCS
PL6060-30W-CK	30W	595x595x32	580x580	140LM/W (130LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-30W-CK	30W	620x620x32	605x605	140LM/W (130LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-30W-CK	30W	1195x295x32	1180x280	140LM/W (130LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL60120-50W-CK	50W	1195x595x32	1180x580	140LM/W (130LM/W UGR<19)	3.20 3.90	4PCS
PL6060-20W-CK NEW	20W	595x595x32	580x580	180LM/W (160LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-20W-CK NEW	20W	620x620x32	605x605	180LM/W (160LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-20W-CK NEW	20W	1195x295x32	1180x280	180LM/W (160LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL60120-40W-CK NEW	40W	1195x595x32	1180x580	180LM/W (160LM/W UGR<19)	3.20 3.90	4PCS

PL-CK5

Backlit panel light



PL-CK5 backlit panel is ultra slim design with external driver, adopts high quality SMD led with optical lens to provide a uniform light effect, high efficiency, no LGP design makes this panel more cost effective compared with normal edge-lit panel. UGR19, CCT switchable are available.

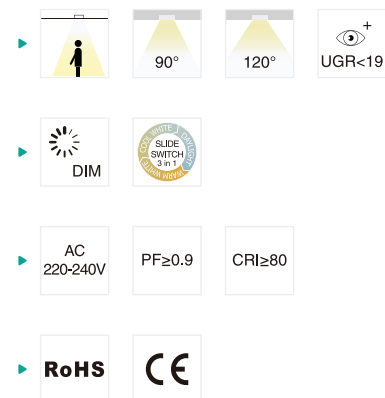


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK5	36W	595x595x25	580x580	3800lm	1.82	5PCS/6PCS
PL6262-36W-CK5	36W	620x620x25	605x605	3800lm	1.91	5PCS/6PCS
PL-30120-36W-CK5	36W	1195x295x25	1180x280	3800lm	1.86	5PCS/6PCS

CCT 3000K 4000K 5700K


Finish White

PL-CK2

Backlit panel light



PL-CK2 panel is a patented frameless design with larger lighting area, direct lighting way makes full use of all light. Adopt high lumen 2835 SMD light source, the optical lens provides a uniform light output. The lamps are directly provided with pendants, which is convenient for installation. 2CCT/ 3CCT adjustable by slide switch is available.

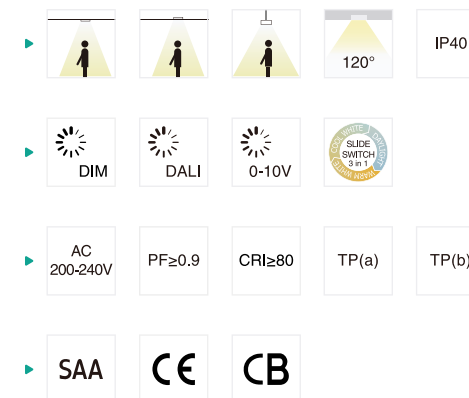


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK2	36W	595x595x28	580x580	120LM/W	1.50	5PCS/6PCS
PL6262-36W-CK2	36W	620x620x28	605x605	120LM/W	1.82	5PCS/6PCS
PL30120-36W-CK2	36W	1195x295x28	1180x280	120LM/W	1.76	5PCS/6PCS
PL6060-25W-CK2	25W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-25W-CK2	25W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-25W-CK2	25W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS
PL6060-28W-CK2	28W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-28W-CK2	28W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-28W-CK2	28W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS

CCT 3000K 4000K 5000K 5700K

Finish White


PL-CK8

Backlit Panel light




PL-CK8 panel is backlit panel with frameless design. Adopt high lumen 2835 SMD light source, CRI>80 and CRI>90 for option, CCT switch is available. Recessed, suspended and surface mounted installation ways for choice.

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-CK8-18W	18W	595x295x50	580x280	1800lm	1.80	5PCS
PL6060-CK8-36W	36W	595x595x50	580x580	3600lm	2.70	5PCS
PL30120-CK8-36W	36W	1195x295x50	1180x280	3600lm	3.20	5PCS

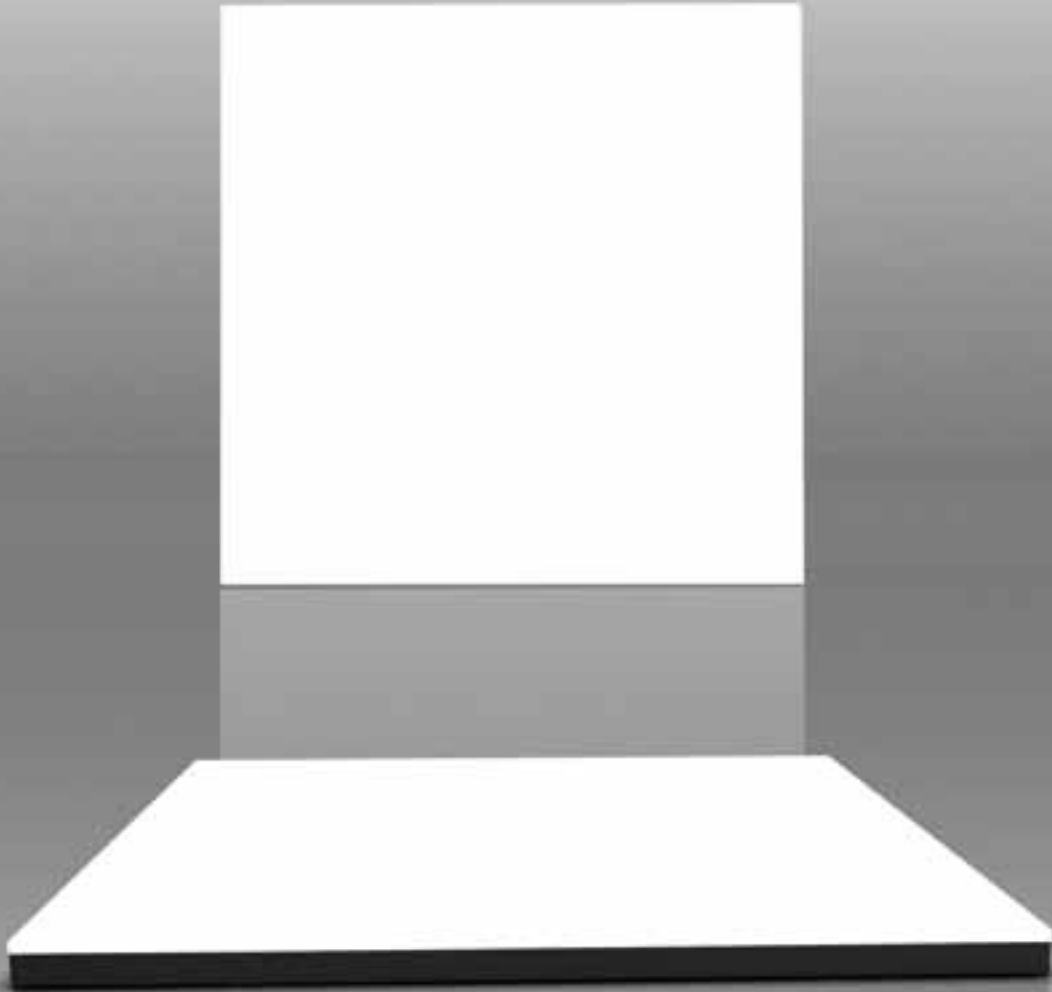


PL-CK8
FRAMELESS PANEL

PL-G5B Panel light



PL-G5B panel is 10mm thickness panel, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

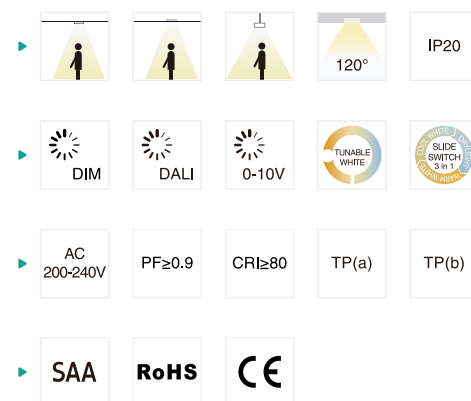


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G5B	10W	295x295x10	280x280	1210lm	0.76	10PCS
PL3060-20W-G5B	20W	595x295x10	580x280	2530lm	1.37	5PCS
PL6060-28W-G5B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G5B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G5B	28W	620x620x10	605x605	3696lm	2.80	5PCS
PL6262-33W-G5B	33W	620x620x10	605x605	4356lm	2.80	5PCS
PL30120-28W-G5B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G5B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G5B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS


CCT 3000K 4000K 5000K 5700K

Finish White

PL-G6B Panel light



PL-G6B is UGR<19 LED panel with 10mm thickness, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. It also can meet the medical light source COI <3.3. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. The ultra slim profile fits seamlessly into any work place. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

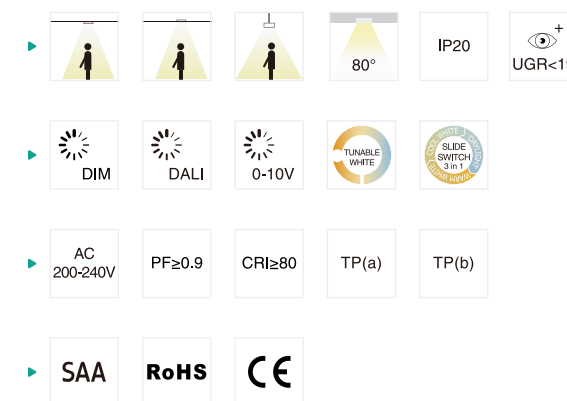

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G6B	10W	295x295x10	280x280	1210lm	0.76	10PCS
PL3060-20W-G6B	20W	595x295x10	580x280	2530lm	1.37	5PCS
PL6060-28W-G6B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G6B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G6B	28W	620x620x10	605x605	3696lm	2.80	5PCS
PL6262-33W-G6B	33W	620x620x10	605x605	4356lm	2.80	5PCS
PL30120-28W-G6B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G6B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G6B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS


CCT 3000K 4000K 5000K 5700K

Finish White



PL-CC


Panel light



PL-CC panel is 14.3mm thickness panel with external driver, adopts high lumen LED chips with CRI>80, PMMA LGP produces uniform and comfortable light. Stronger frame makes better heat dissipation than common panels. The lighting area fits seamlessly with the ceiling. Recessed installation with clips make it suitable for more kinds of ceiling perfectly.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-33W-CC	33W	595x595x14.3	580x580	3530lm	2.50	5PCS
PL6060-42W-CC	42W	595x595x14.3	580x580	4370lm	2.50	5PCS
PL30120-33W-CC	33W	1195x295x14.3	1180x280	3400lm	2.65	5PCS
PL30120-42W-CC	42W	1195x295x14.3	1180x280	4210lm	2.65	5PCS

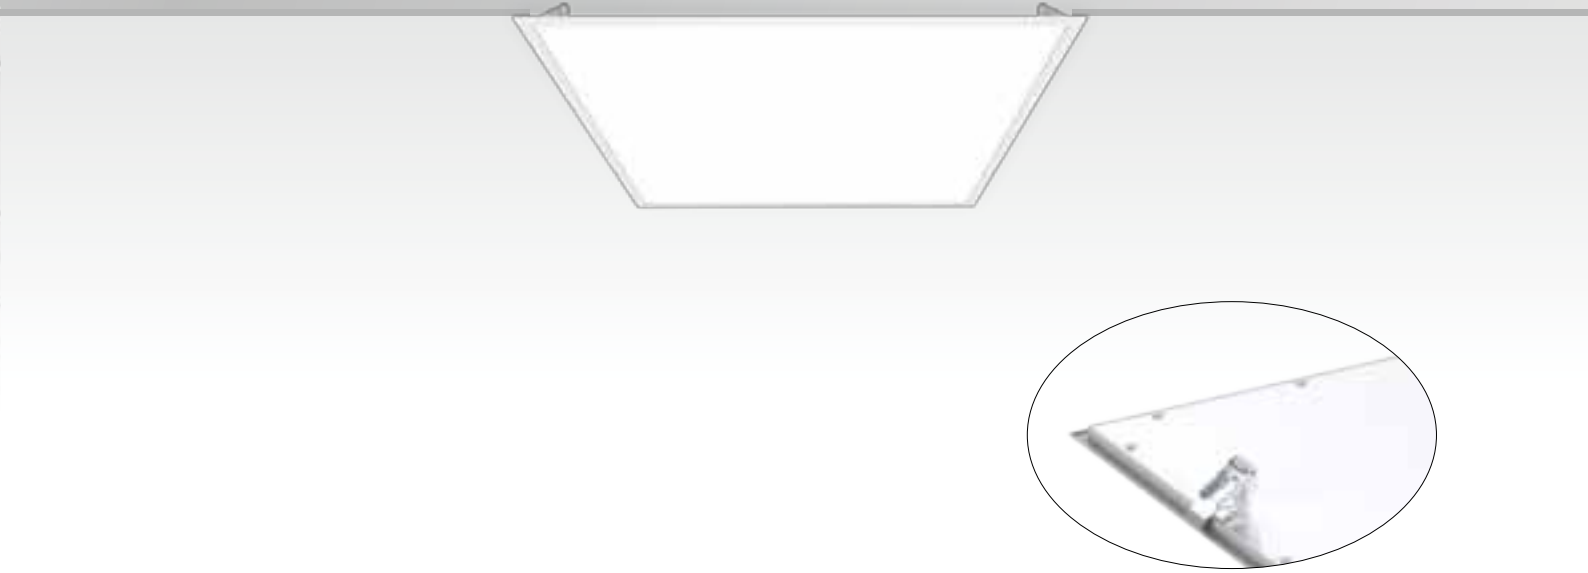

PL-CD

Panel light




PL-CD panel light is 8.5mm thickness frame with fixed spring design panel light with external driver, adopts high lumen LED chips with CRI>80, special frame design provides excellent thermal management. Recessed installation with clips makes it suitable for more kinds of ceiling.


-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-33W-CD	33W	595x595x35.5	580x580	3460lm	2.35	5PCS
PL30120-33W-CD	33W	1195x295x35.5	1180x280	3400lm	2.40	5PCS

PL-DP Panel light

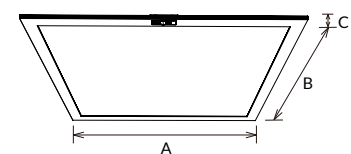


PL-DP is smart panel light , which is comprised of driver, smart control module and induction module. Connect Bluetooth between the mobile phone and the lamp, then the mobile phone APP can control the lamp. Users can adjust the brightness and color temperature of lamps according to their own needs. Automatic light supplement can also be realized by photo sensor. The PIR sensor is used to switch the lamp, and the indicator light is used to display the on/ off state of the photosensitive sensor and PIR sensor of the Lamp.

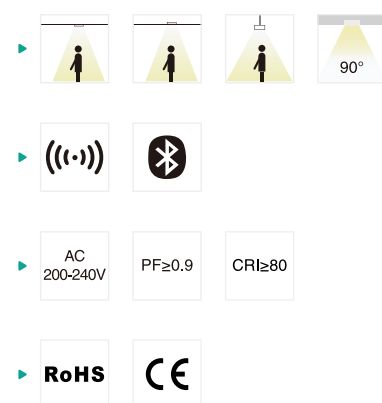

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-40W-DP	40W	595x595x8.5	580x580	4000lm	3.10	4PCS
PL6262-40W-DP	40W	620x620x8.5	605x605	4000lm	3.50	4PCS
PL30120-40W-DP	40W	1195x295x8.5	1180x280	4000lm	3.10	4PCS

CCT 2700K~6500K

Finish White

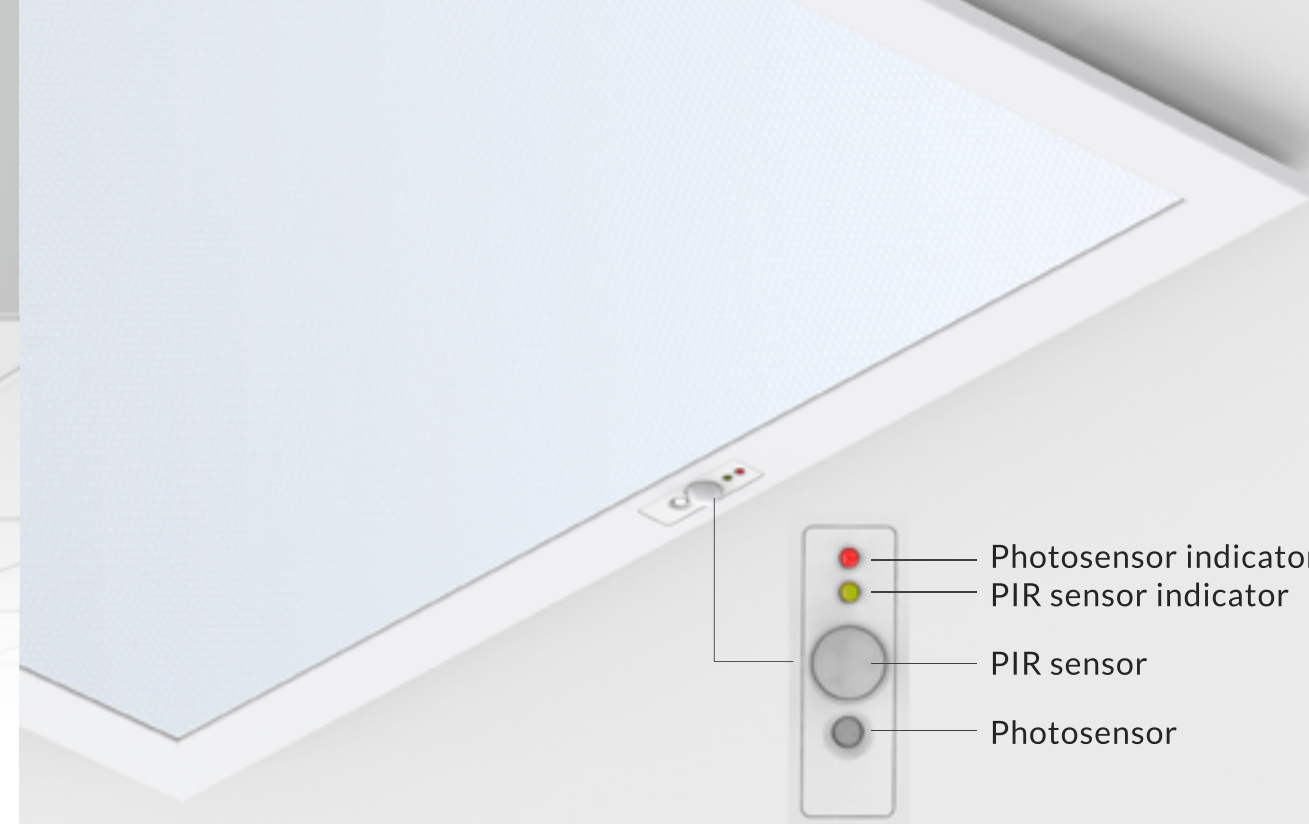

PHOTOSENSOR

daylight harvest, change brightness according to the ambient

PIR SENSOR

hold time & detection distance adjustable


SMARTPHONE APP CONTROL

- CCT Adjustable
- Time setting
- turn on/off sensors in App
- Dimming
- Electricity consumption
- Self-test function
- Photosensor
- Record
- Scene setting

STANDBY POWER<0.5W



PL-DE Panel light




PL-DE is a new grill design with UGR<19.COI (Cyanosis Observation Index) compliant.Air slot available.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-DE	13W	292x592x48	/	1365lm	2.60	4PCS
PL3012-DE	28W	1192x292x48	/	2940lm	2.99	4PCS
PL4012-DE	28W	1192x392x48	/	2940lm	2.73	2PCS
PL6060-DE	28W	592x592x48	/	2940lm	5.41	4PCS
PL3015-DE	40W	1492x292x48	/	4200lm	3.73	4PCS

CCT 3000K 4000K 5000K 5700K


Finish White

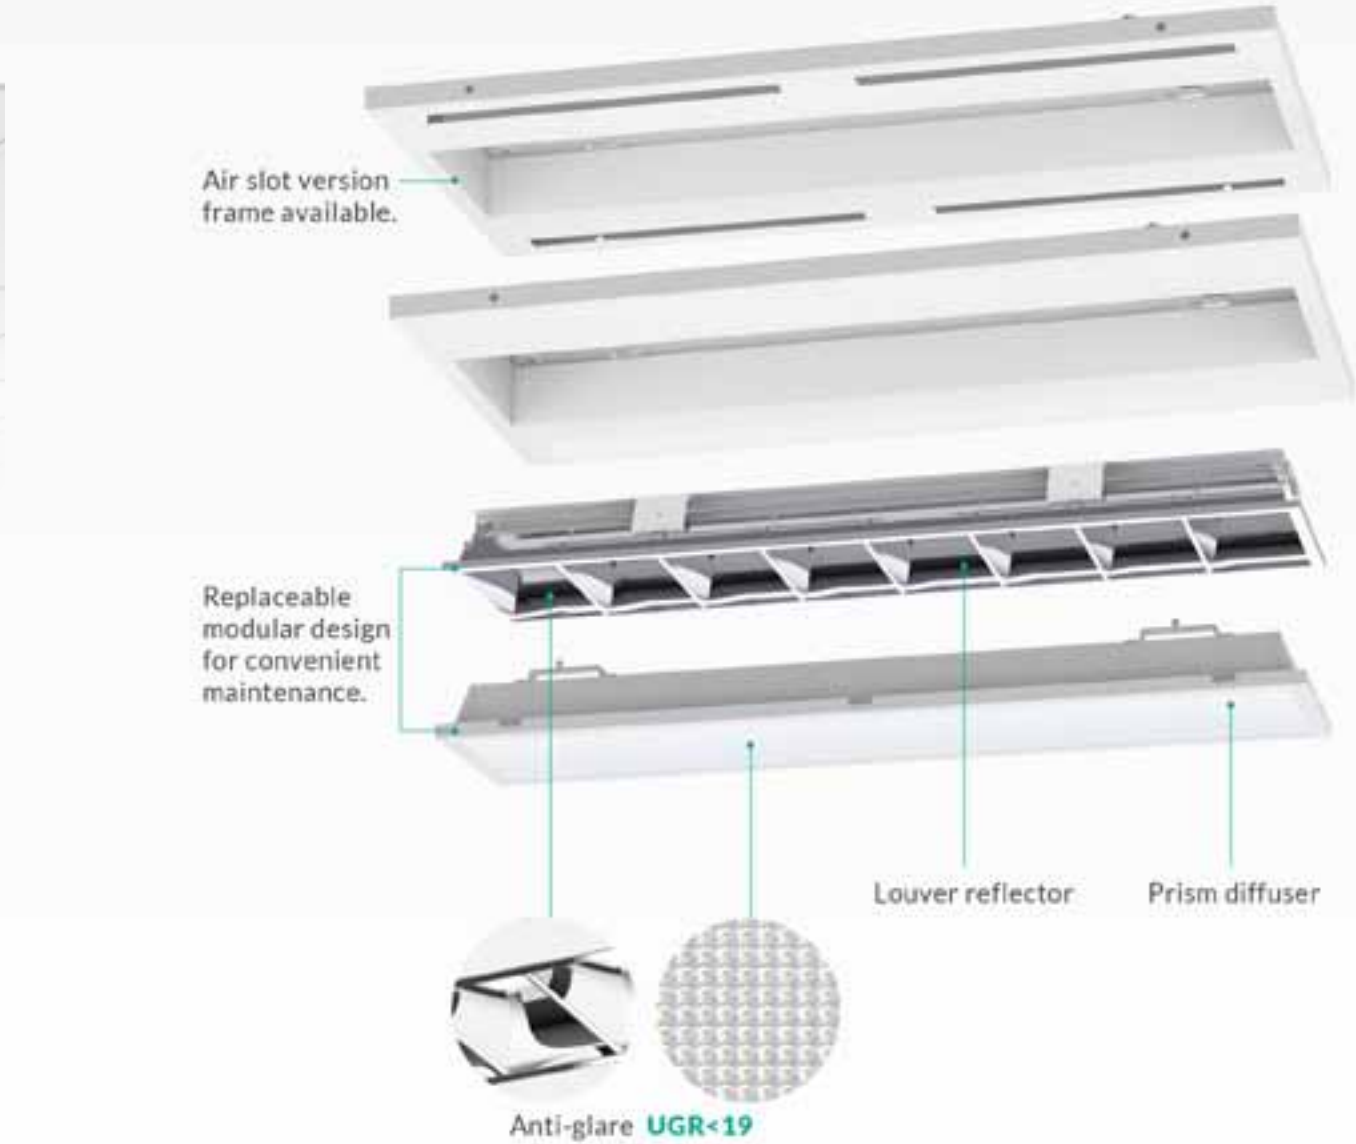


PL-DE MODULAR DESIGN LED PANEL

Replaceable modular design for convenient maintenance

GL-AA Panel light



GL-AA backlit troffer is anti-glare design, the compact and seamless splicing make it a great looking .It adopts anti-glare prism plate to reach UGR<19,could be interchangeable CCT (3000K+4000K+5700K) with slide switch.

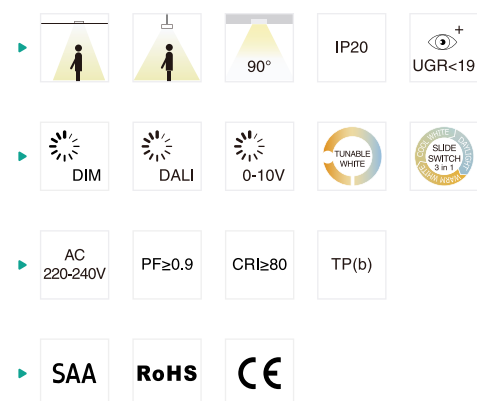


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-36W-AA	36W	595x595x49	580x580	3700lm	2.60	5PCS
GL30120-36W-AA	36W	1195x295x49	1180x280	3700lm	2.99	5PCS
GL6262-36W-AA	36W	620x620x49	605x605	3700lm	2.73	5PCS
GL60120-60W-AA	60W	1195x595x49	1180x580	6500lm	5.41	2PCS


CCT 3000K 4000K 5000K 5700K

Finish White

GL-N Troffer light




GL-N is troffer light with external driver, adopts secondary optical designed and special treatment diffuser to achieve more uniform and softer light, providing more comfortable visual experience. Luminous efficiency 105lm/W. Powder spraying surface treatment is employed in the lamp fixture which makes the lamp corrosion resistant. Designed for grid ceiling commercial applications.

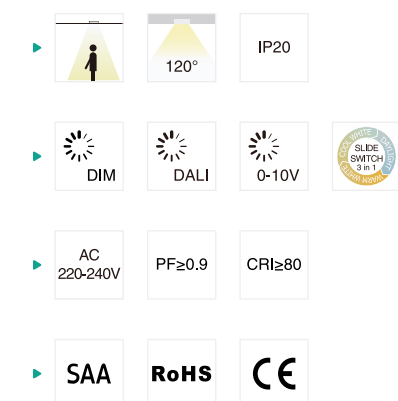


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-33W-N	33W	595x595x54	580x580	3850lm	2.50	5PCS
GL30120-33W-N	33W	1195x295x54	1180x280	3850lm	2.70	5PCS

CCT 3000K 4000K 5000K 5700K


Finish White

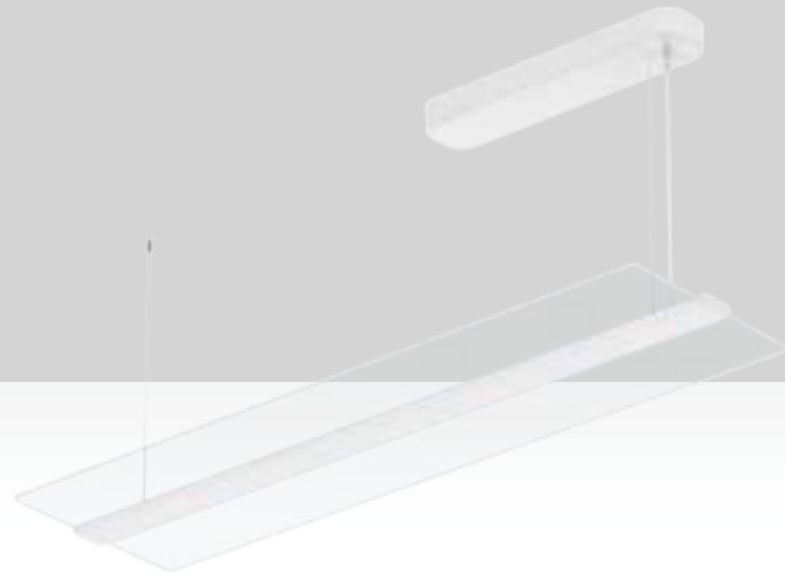

PL-DF Panel light




This panel light is a frameless, transparent and 360 degree lighting design, which provides a great visual aesthetic feeling. Adopt high lumen SMD light source, the 4mm transparent PMMA LGP makes a uniform, soft lighting output and reaches anti-glare UGR<19. 6063 aluminum heat sink makes an excellent thermal management. Magnetic mounting box can also save much time for installation.

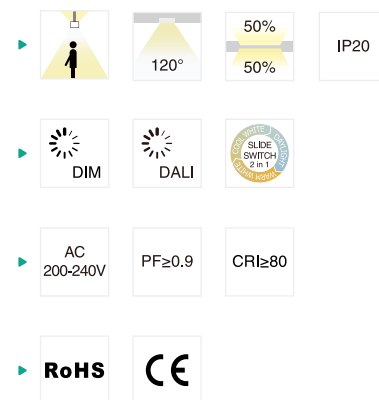


Code	Watt	Size(AxBxCxDxExFxGmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL35120-40W-DF	40W	1200x350x1500x19x422x480x43	5500lm	4.50	2PCS
PL35120-40W-DF-D	40W	1200x350x1500x19x422x480x43	5500lm	4.50	2PCS
PL35120-60W-DF	60W	1200x350x1500x19x422x480x43	8200lm	4.50	2PCS

CCT 3000K 4000K 5700K


Finish White

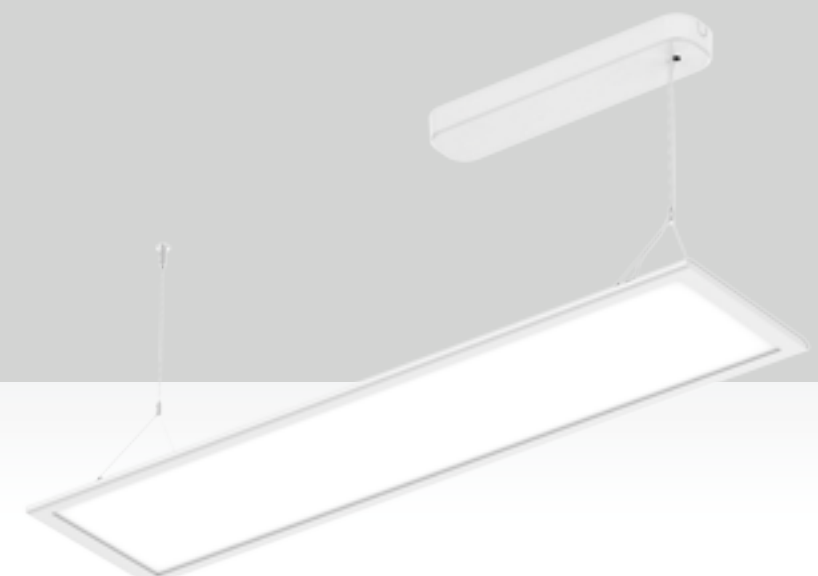

PL-DB Panel light

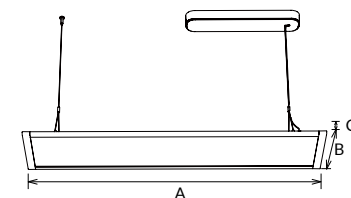

PL-DB panel light is an Up & down emitting panel with external driver, novel design without any screw make it a special and good looking panel. Besides, it is an anti-glare UGR<19 design without Prism plate, this is a new tendency for high end market. Magnetic mounting box can also save much time for installation, Triac dim and DALI dimming options.

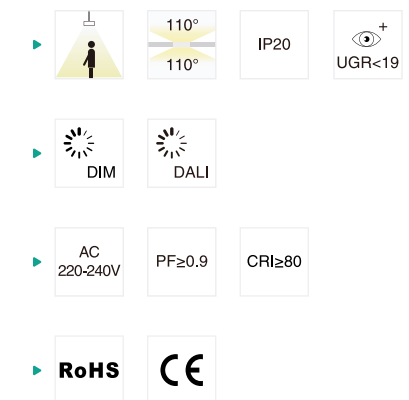


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL30120-30W-DB	30W	1200x300x16.5	3060lm	3.76	2PCS
PL30120-40W-DB	40W	1200x300x16.5	4000lm	3.76	2PCS
PL30120-50W-DB	50W	1200x300x16.5	4950lm	3.76	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White



PL-DG Panel light



PL-DG pendant panel light is a translucent and 30% up & 70% down lighting design, which can be used in many applications as a decorative light. It adopts high quality diffuser and 3.0T PMMA light guide plate which provide a high transmittance rate and uniform light. Steel wire mounted on the edge of frame is more convenient and much safer. 300mm, 400mm, 500mm, 600mm size options. Interchangeable CCT (3000/4000/5700K) with slide switch is available.

- 120°
 120°
 30%
 70%
 IP20
- DIM
 DALI
 0-10V
- AC 220-240V
 PF≥0.9
 CRI≥80
- RoHS
 CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-DG	18W	Ø300x11.5	1820lm	1.25	5PCS
PL4012-35W-DG	35W	Ø400x11.5	3605lm	1.75	4PCS
PL5012-40W-DG	40W	Ø500x11.5	4120lm	2.25	4PCS
PL6012-60W-DG	60W	Ø600x11.5	6210lm	3.15	2PCS



PL-DG PENDANT LED ROUND PANEL

UP & DOWN translucent
lighting 30%:70%



Slim transparent
body design



PMMA LGP



Translucent lighting area can
offer a great decorative
effect



Suspension




Surface mounted




Recessed

PL-DR Backlit panel light

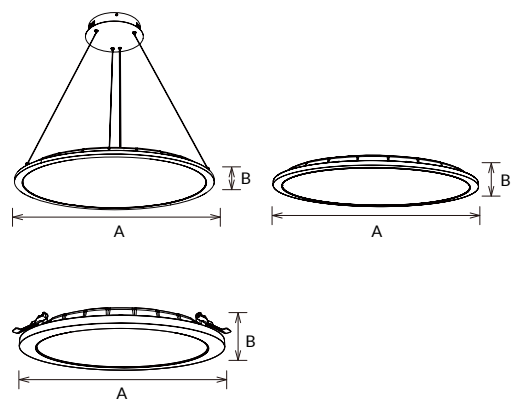

PL-DR is a direct lighting panel with appearance design patent. Adopts 2835 SMD light source and PMMA lens which generated a great uniform light output. For structure, it has a super slim lamp body and supports embedded surface mounted and suspended installation way. 400mm, 500mm, 600mm sizes for embedded surface mounted version, 300mm, 400mm, 500mm, 600mm for suspended version.

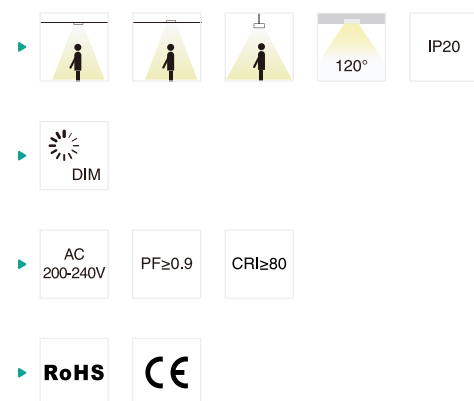


CCT ——— 3000K 4000K 5000K 5700K

Finish ——— White


Code	Watt	Size(AxBmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL300-18W-DR	18W	Ø300x13.8	/	1980lm	1.44	4PCS
PL400-25W-DR	25W	Ø400x13.8	Ø200-240	2750lm	1.92	4PCS
PL400-35W-DR	35W	Ø400x13.8	Ø200-240	4000lm	1.92	4PCS
PL500-30W-DR	30W	Ø500x13.8	Ø200-240	3960lm	2.50	4PCS
PL500-35W-DR	35W	Ø500x13.8	Ø200-240	4300lm	2.50	4PCS
PL600-35W-DR	35W	Ø600x13.8	Ø200-240	4300lm	3.26	2PCS
PL600-45W-DR	45W	Ø600x13.8	Ø200-240	5950lm	3.26	2PCS
PL600-55W-DR	55W	Ø600x13.8	Ø200-240	6650lm	3.26	2PCS



PL-W Panel light




PL-W LED pendant decorative light with high quality diffuser and 3T PMMA LGP. 300mm, 400mm, 500mm, 600mm and 780mm diameter for options. Various installation ways include suspended, surface mounted and recessed.

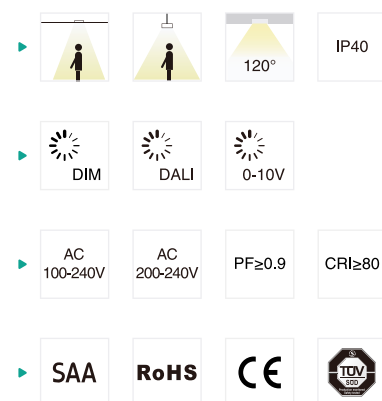


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-W	18W	Ø300x12	1560lm	2.50	5PCS
PL4012-25W-W	25W	Ø400x12	2070lm	3.10	4PCS
PL4012-35W-W	35W	Ø400x12	2900lm	3.10	4PCS
PL5012-30W-W	30W	Ø500x12	2520lm	4.20	4PCS
PL5012-35W-W	35W	Ø500x12	2900lm	4.20	4PCS
PL6012-35W-W	35W	Ø600x12	3040lm	4.34	2PCS
PL6012-45W-W	45W	Ø600x12	3600lm	4.34	2PCS
PL8012-60W-W	60W	Ø780x20	5430lm	6.10	2PCS
PL8012-80W-W	80W	Ø780x20	7460lm	6.90	2PCS

CCT 3000K 4000K 5000K 5700K


Finish White

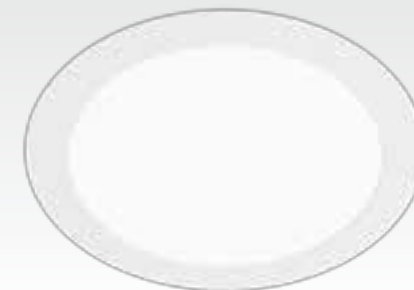

PL-DD Panel light

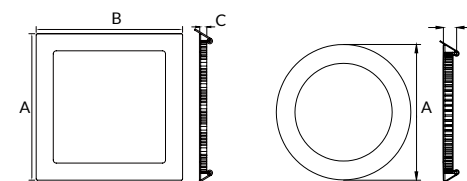


PL-DD is small size panel with complete diameter options. 2835SMD LED chip and PMMA LGP offer a great light transmittance and light output. Adopt die-casting aluminum frame which provides a great thermal management. External driver comes with triac dim, it shares great popularity by perfect dimming range and great compatibility with worldwide dimmers. The ultra slim profile fits perfectly for all working places.

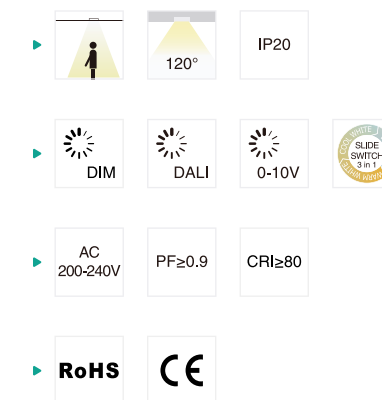

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL1212-7W-DD	7W	120x120x21	105x105	580lm	0.24	36PCS
PL1515-9W-DD	9W	146x146x21	127x127	810lm	0.28	24PCS
PL1717-12W-DD	12W	171x171x21	155x155	1070lm	0.34	20PCS
PL2222-18W-DD	18W	224x224x21	205x205	1580lm	0.52	12PCS
PL3030-24W-DD	24W	300x300x21	277x277	2500lm	0.88	12PCS
PL1221-7W-DD	7W	Ø120x21	Ø108-113	580lm	0.20	36PCS
PL1521-9W-DD	9W	Ø145x21	Ø127-133	810lm	0.24	24PCS
PL1721-12W-DD	12W	Ø170x21	Ø157-162	1050lm	0.29	20PCS
PL2021-15W-DD	15W	Ø200*21	Ø177-182	1470lm	0.35	12PCS
PL2221-18W-DD	18W	Ø224x21	Ø205-212	1680lm	0.42	12PCS
PL2421-22W-DD	22W	Ø238*21	Ø224-228	2150lm	0.50	12PCS
PL3021-24W-DD	24W	Ø300x21	Ø282-288	2500lm	0.71	12PCS


CCT 3000K 4000K 5000K 5700K 6500K

Finish White

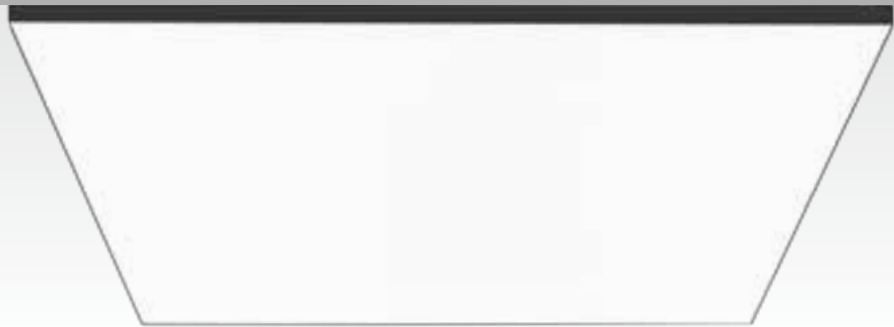

PL-EA

Panel light



PL-EA is a big size panel with simple and elegant design. CRI>90, adopting high quality SMD led and secondary light distribution design to provide uniform light output. Fireproof B1 grade soft film as luminous cover and 0.5mm thickness backboard make this panel looks very reliable.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL120120-60W-EA	60W	1200x1200x110	4800lm	11	1PCS
PL120240-120W-EA	120W	1200x2400x110	9600lm	21	1PCS
PL120300-180W-EA	180W	1200x3000x110	14400lm	27	1PCS
PL150150-80W-EA	80W	1500x1500x110	6400lm	17	1PCS
PL150300-240W-EA	240W	1500x3000x110	19200lm	34	1PCS

CCT

3000K

4000K

5000K

5700K


Finish

Black

Installation accessories

Suspension kit

Surface mounted kit

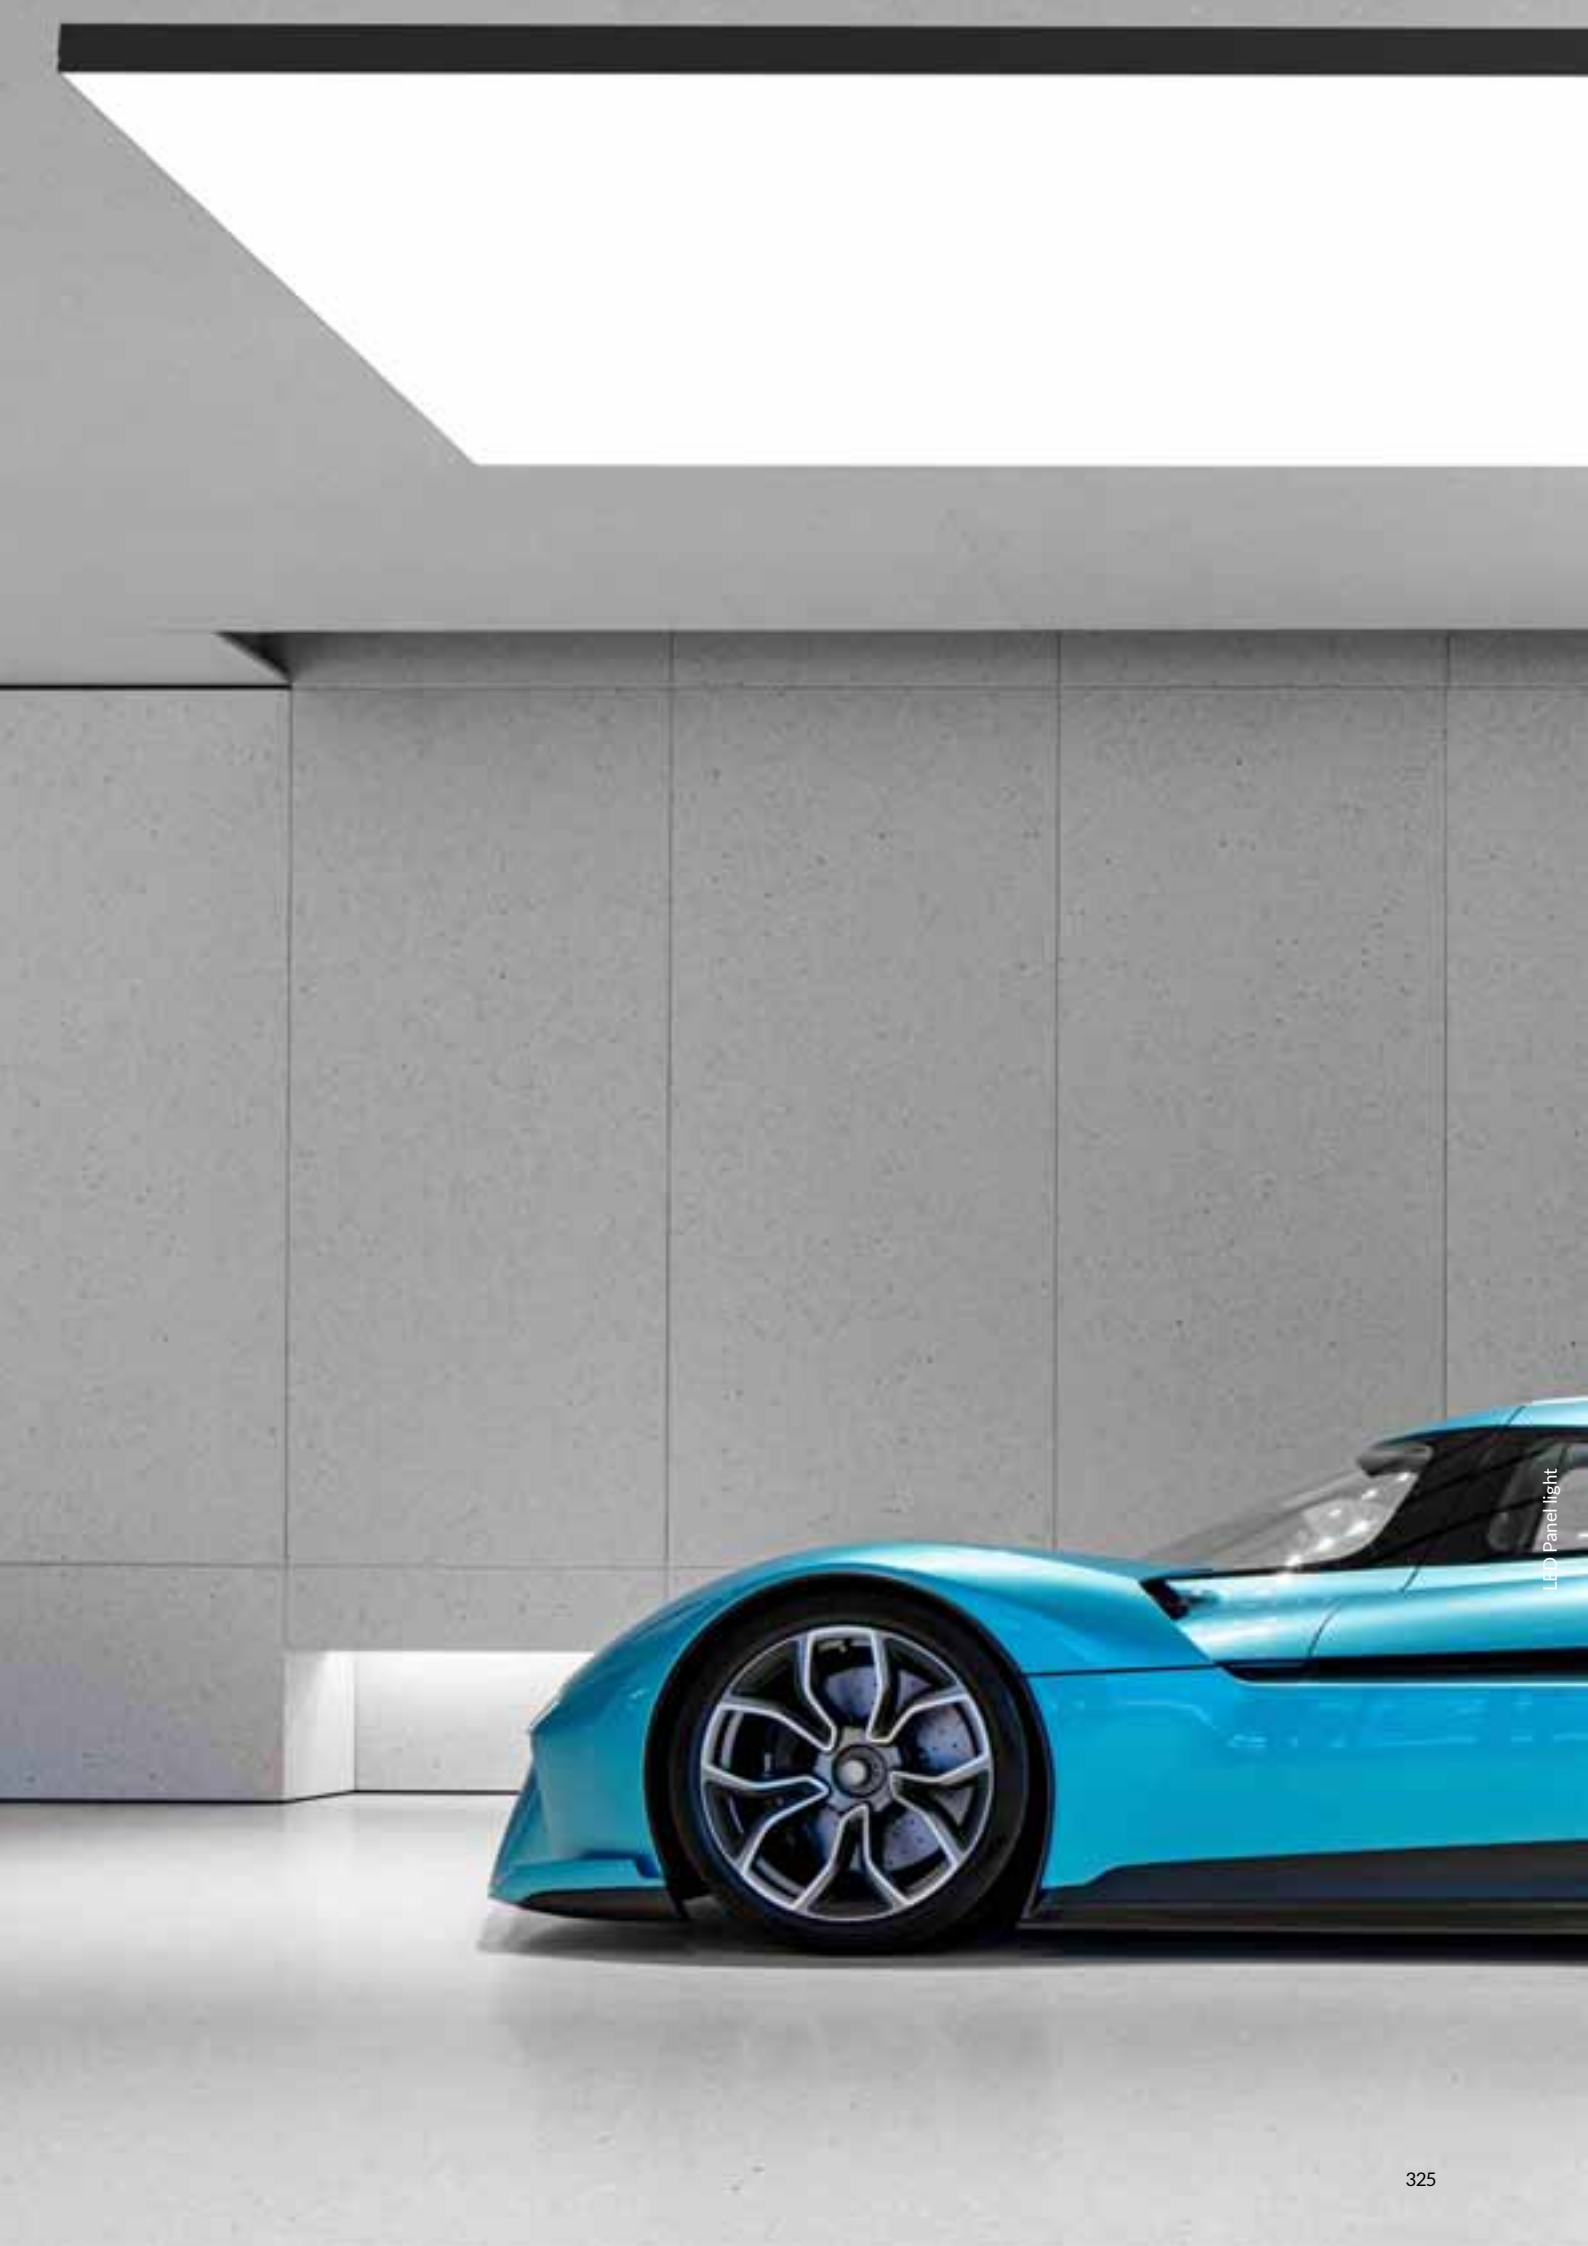

Assembled surface mounted frame



CF01



CF13




DIY surface mounted frame



CF04



CF11

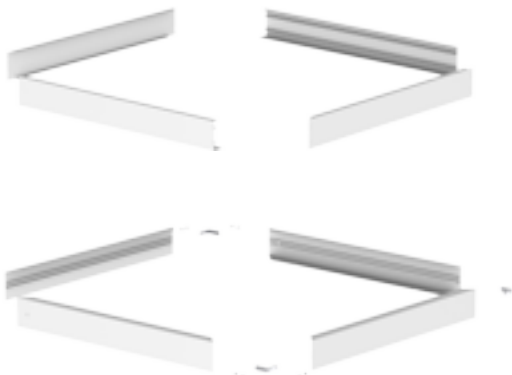

Assembled embedded mounted frame



RF01



RF02



Suspending Kits



Recessed Installation Clips




Integrated Recessed Installation Clips





OL02 LED freestanding luminaire

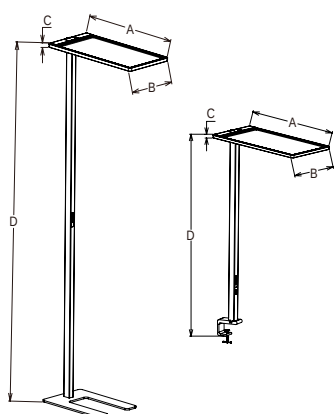

This OL02 freestanding lamp is composed of three parts: flat lamp body, lamp pole and lamp base. With a precise optical design (UGR<14, up 75% & down 25% lighting), it can ensure a more uniform and more comfortable lighting effect. Lamp Pole with: Plug, touchable 0-10V dimmer, light sensor and PIR sensor module.


- 75%
25%
UGR<14
- 0-10V
- AC 220-240V
PF≥0.93
CRI≥80
- RoHS
- CE

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL02/B-75W-DOS	75W	720x340x21.5x1925	8200lm	Flat lamp body:2.70 Lamp pole:3.10 Lamp base:6.70	6PCS 6PCS 2x3PCS
OL02C/D-75W-DOS	75W	720x340x21.5x1288	8200lm	Flat lamp body:2.70 Lamp pole:3.00	6PCS 6PCS

CCT 3000K~5700K

Finish White Black

- Indirect lighting and direct lighting (500~700LUX on the desk)
- PMMA LGP with Prismatic diffuser to achieve UGR<14 ideal for office lighting.

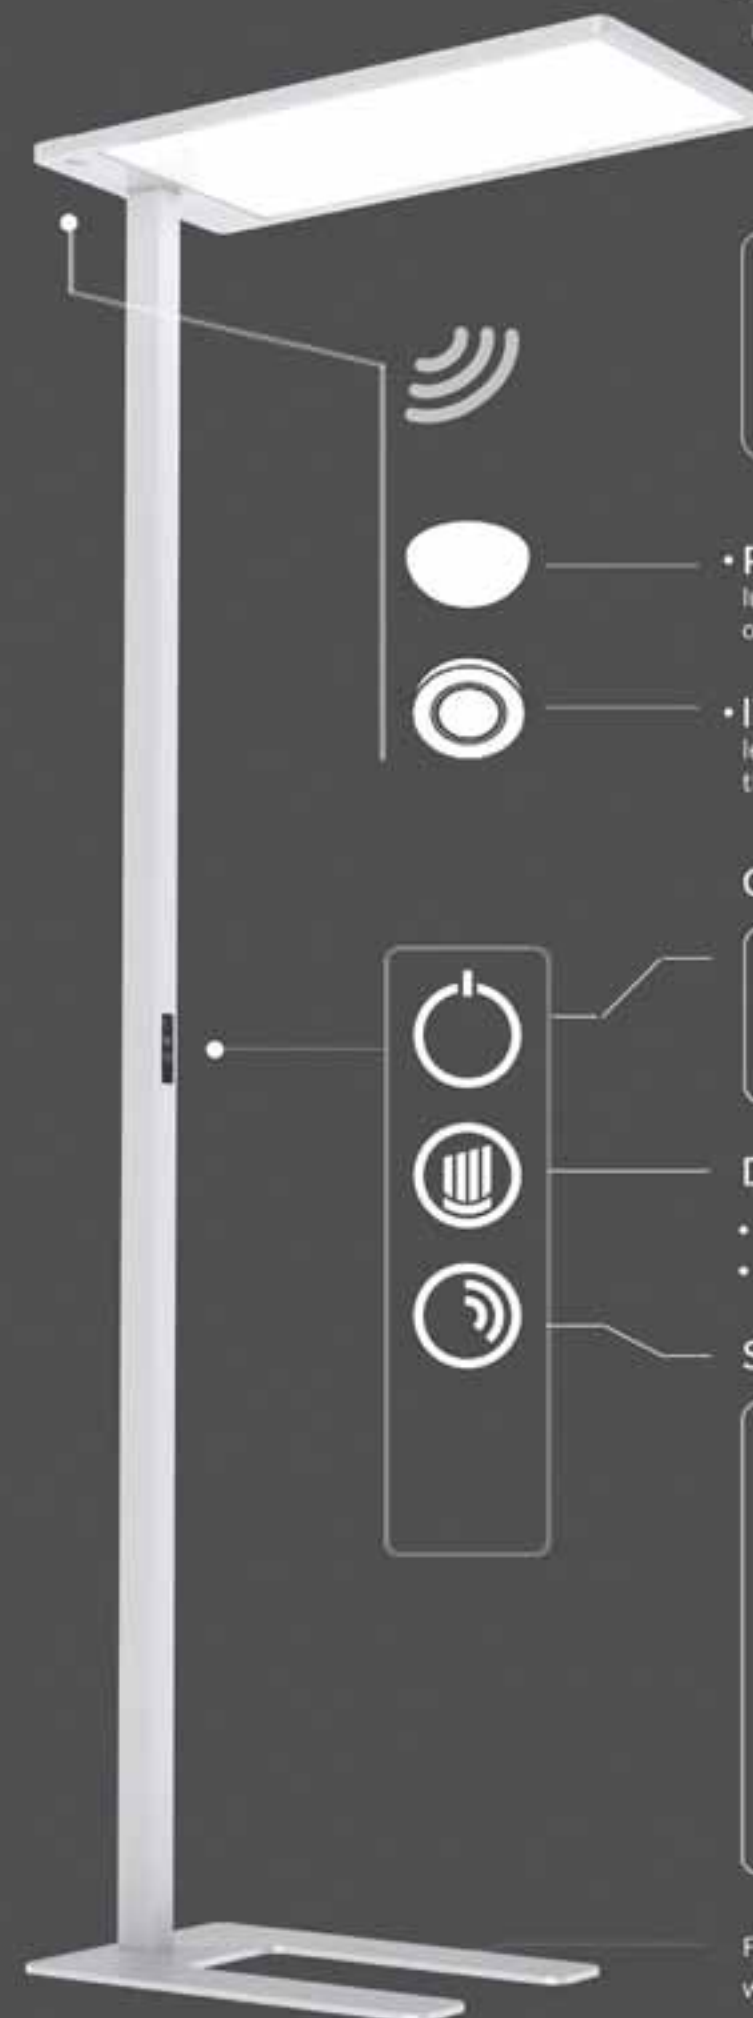

STATUS



• **PIR sensor** detector automatically switches the luminaire on and then switches it off when there is no one in the room.

• **light sensor** continuously measures the illuminance level on the desk and dims the light itself depending on the amount of available daylight and artificial lighting.

ON/OFF



Dimming button

- Short press in 1s, brightness will increase/ decrease 5%
- Long press brightness will increase/ decrease continually


Sensor




Flat lamp base with reliable stability/saving space and widely work with office furniture



OL06 LED freestanding luminaire

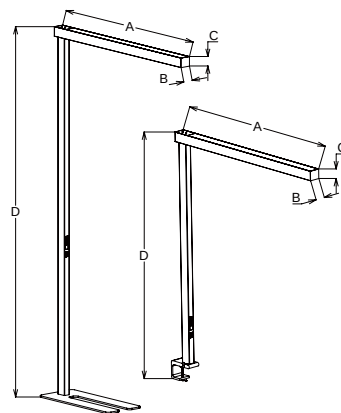

This OL06 free-standing luminaire is composed of three parts. OL06A is for floor standing, OL06B is for desk installation. OL06C is for floor standing with smart control, OL06D is for desk installation with smart control. Direct and indirect optic design, UGR<16, up 75% & down 25% lighting, up to 125lm/W high light efficiency. 0-10V dimmer, light sensor, PIR sensor module and USB connector are available. The configuration of the luminaire is triggered by pressing a button. The lighting control modules are interchangeable, which is very suitable for modern office environments.

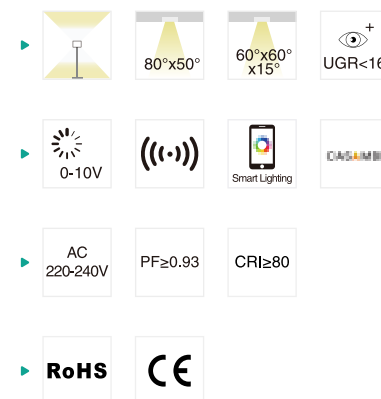


Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL06A-80W-DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
OL06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
OL06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS

CCT 3000K 4000K 5000K 5700K


Finish White



OL07 LED freestanding luminaire

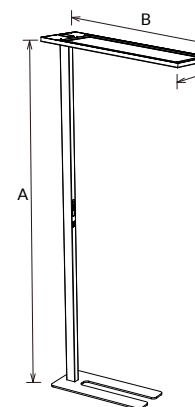

OL07 LED freestanding luminaire with professional version and intelligent version. The professional version could be PIR sensor and daylight sensor. The intelligent version could be CCT changeable and dim by CANSAMBI. 120 degree beam angle and UGR<16 could provide uniform lighting performance.

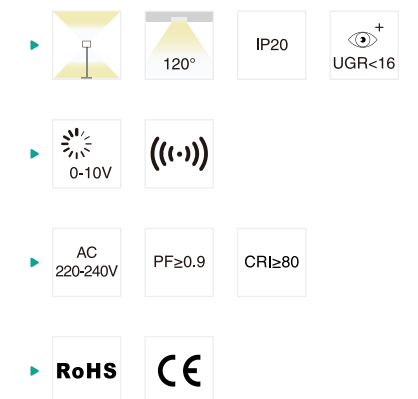


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
OL07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
OL07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
OL07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
OL07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
OL07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS

CCT 3000K 4000K 5000K

Finish White



OL01 LED freestanding luminaire

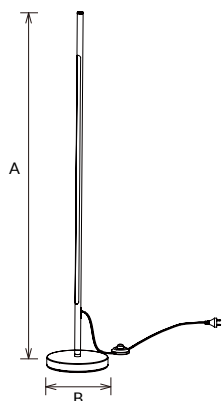

OL01 is a freestanding light combines modern industrial style, the unique shape and simple design perfectly fit the aesthetic concept of modern society. It adopts Tuya WIFI+2.4G intelligent technology, create various atmospheres, can switch to different lighting scenes according to your needs. Supporting both smart phone control and remote control, make it very convenient and easy control for different users. The slender body, plug and play, makes it convenient for different position.


- ▶ 120°
- ▶ IP20
- ▶ AC 200-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL01-15W-WG	15W	1600x182	1400lm	Base:2.2 Lamp Body:0.6	6PCS 18PCS

CCT 3000K~5700K

Finish White Black



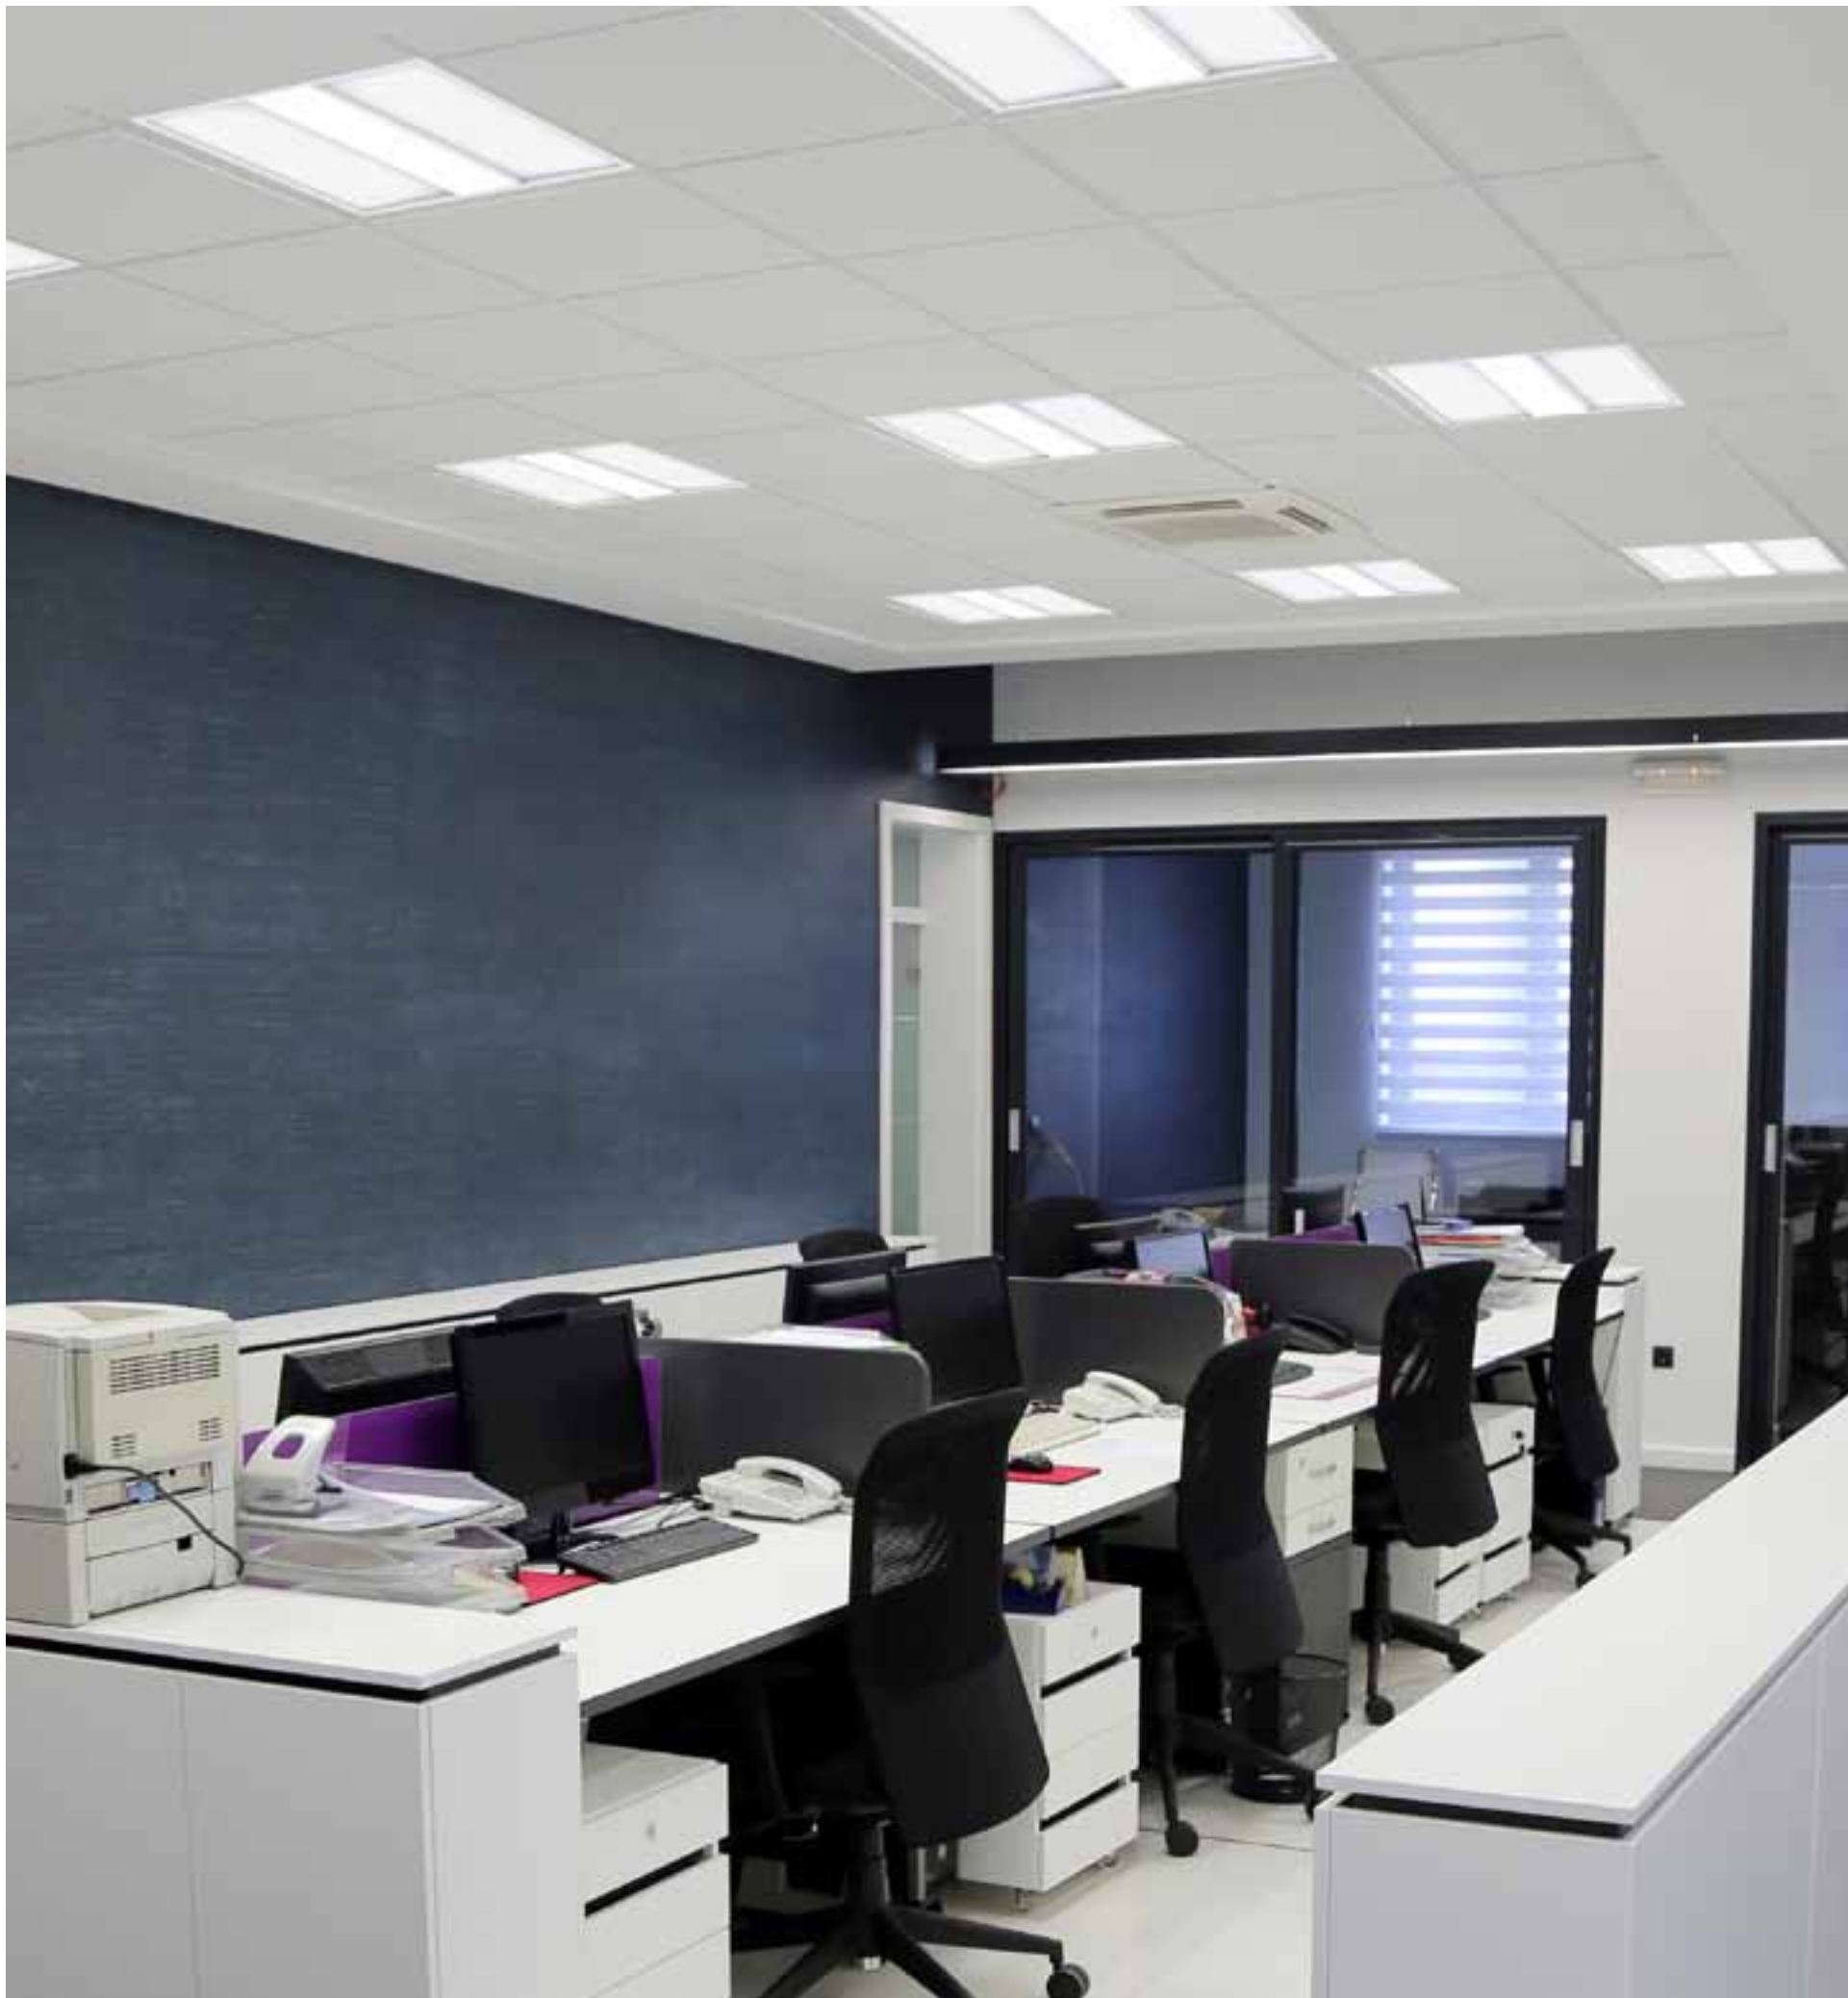


LED Panel Light


/Series/

LED panel light is one of the most popular luminaire for commercial lighting, with continuous modification of its design, light efficiency, CRI, UGR and smart function, UPSHINE Lighting is always capable of providing customers with helpful solution and best price, that's the main reason UPSHINE Lighting is preferred supplier of LED panel lamp in the market. UPSHINE LED panel family supply different solution for project and distribution, such as regular LED panel with high Lumen and low UGR, CCT changing LED panel, waterproof led panel, frameless led panel, Up/down emitting led panel, big size round led panel with recessed / surface mounted / pendant installation, TUV-CE approved Upshine driver and Lifud, Tridonic, Philips driver ensure our reputation of quality always.

GL-P Panel light



GL-P panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC + ABS module form ideal combination of stylish design, it is a perfect replacement for traditional grill lamp.

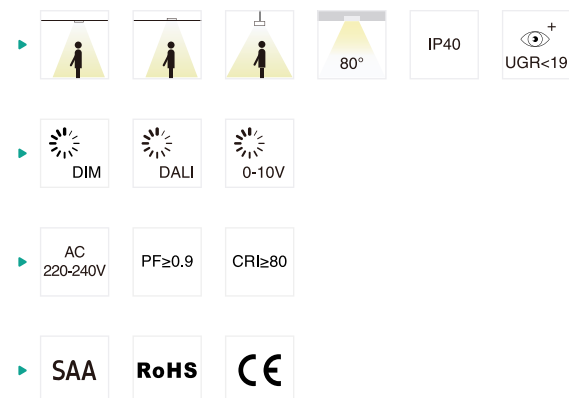


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-35W-P	35W	595x595x23.5	555x555	3995lm	3.50	4PCS
GL6262-35W-P	35W	620x620x23.5	580x580	4090lm	3.65	4PCS
GL30120-35W-P	35W	295x1195x23.5	255x1155	3995lm	3.55	4PCS
GL60120-60W-P	60W	595*1195*23.5	555x1155	6600lm	6.80	2PCS


CCT 3000K 4000K 5000K 5700K

Finish White

PL-AZ Panel light



PL-AZ panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC module form ideal combination of stylish design, the luminous module can be replaced, which ensure the easy maintenance. it is a ideal replacement for traditional 3*24W HO T5 and 3*18W T8 fluorescent louver luminaries and side lit LED panel light.

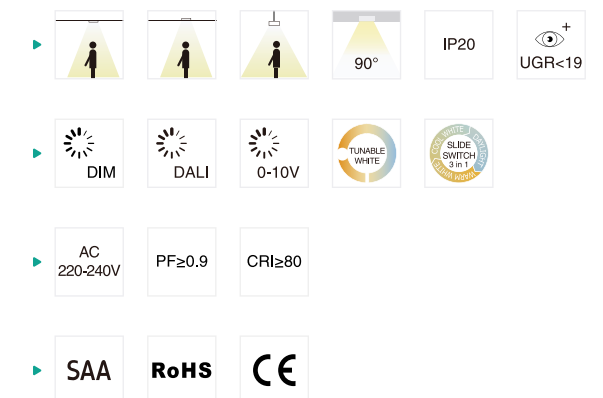


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-30W-AZ	30W	595x595x15	580x580	3450lm	3.20	4PCS
PL6060-35W-AZ	35W	595x595x15	580x580	3950lm	3.20	4PCS
PL6262-30W-AZ	30W	620x620x15	605x605	3450lm	3.50	4PCS
PL6262-35W-AZ	35W	620x620x15	605x605	3950lm	3.50	4PCS
PL30120-30W-AZ	30W	1195x295x17.5	1180x280	3450lm	3.60	4PCS
PL30120-35W-AZ	35W	1195x295x17.5	1180x280	3950lm	3.60	4PCS


CCT 3000K 4000K 5000K 5700K

Finish White

PL-AK Panel light



PL-AK panel light is a module design with external driver, featuring PC louver reflectors to help reduce UGR, offers the ideal combination of stylish design and optimum performance for both task and general lighting; Module replaceable, easy to install and maintain.Available in various installation ways: recessed, suspended and surface mounted, and can replace the traditional panel light.

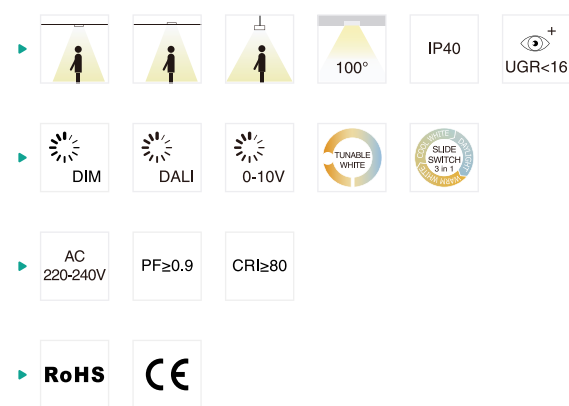


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-18W-AK	18W	595x295x36	580x280	2010lm	1.55	4PCS
PL6060-25W-AK	25W	595x595x36	580x580	3552lm	2.90	4PCS
PL6060-30W-AK	30W	595x595x36	580x580	3660lm	2.90	4PCS
PL6060-36W-AK	36W	595x595x36	580x580	3900lm	2.90	4PCS
PL6262-36W-AK	36W	620x620x36	605x605	3900lm	3.30	4PCS
PL30120-36W-AK	36W	1195x295x36	1180x280	3920lm	2.95	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

PL008 Panel light

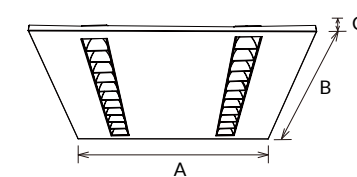

PL008 panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, CCT switchable is avalable, it is a ideal replacement for traditional 3*24W HO T5 and 3*18W T8 fluorescent louver luminaries and side lit LED panel light.



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL008-3060	15W	295x595x32	270x570	1800lm	2.00	5PCS
PL008-6060	30W	595x595x32	570x570	3600lm	3.20	5PCS
PL008-30120	30W	295x1195x32	270x1170	3600lm	3.60	5PCS
PL008-60120	60W	595x1195x32	570x1170	7200lm	6.00	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

PL-CL Panel light



PL-CL LED panel light is a screwless design with flat frame and no back plate, adopting PMMA LGP which produces uniform light and high lumen output, good quality SMD with 110lm/W. Triac dim, 0-10V dimmable, DALI dimmable and 3 CCT interchangeable are available. It can fits seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.

120°

IP20

UGR<19

DIM

DALI

0-10V

SLIDE SWITCH
ON/OFF

AC 200-240V

PF≥0.9

CRI≥80

RoHS

CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-18W-CL	18W	295x295x9	280x280	1850lm	0.56	10PCS
PL3060-20W-CL	20W	295x595x9	280x280	2100lm	0.95	5PCS
PL6060-30W-CL	30W	595x595x9	580x580	3650lm	1.60	5PCS
PL6262-30W-CL	30W	620x620x9	605x605	3650lm	1.75	5PCS
PL30120-30W-CL	30W	1195x295x9	1180x280	3600lm	1.70	5PCS
PL6060-36W-CL	36W	595x595x9	580x580	4000lm	1.60	5PCS
PL6262-36W-CL	36W	620x620x9	605x605	4000lm	1.75	5PCS
PL30120-36W-CL	36W	1195x295x9	1180x280	3900lm	1.70	5PCS

CCT

3000K

4000K

5000K


5700K

Finish


White



PL-CB Panel light



PL-CB panel light is a 9mm thickness panel with external driver; PMMA LGP produce uniform light and high lumen output; Adopts high lumen SMD with CRI>80, 100lm/W, 130lm/W, SDCM<3 solution can be provided, Triac dim, 0-10V dimmable, DALI dimmable, Emergency all available. It can fit seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.

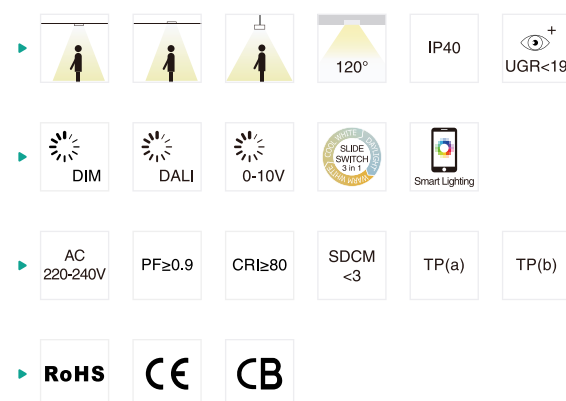

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-18W-CB	18W	295x295x9	280x280	100LM/W	0.85	5PCS
PL3060-20W-CB	20W	595x295x9	580x280	100LM/W	1.35	5PCS
PL30120-33W-CB	33W	1195x295x9	1180x280	100LM/W	2.40	5PCS
PL30120-42W-CB	42W	1195x295x9	1180x280	100LM/W	2.40	5PCS
PL6060-33W-CB	33W	595x595x9	580x580	100LM/W	2.35	5PCS
PL6060-42W-CB	42W	595x595x9	580x580	100LM/W	2.35	5PCS
PL60120-60W-CB	60W	1195x595x9	1180x580	100LM/W	5.30	2PCS
PL6262-33W-CB	33W	620x620x9	605x605	100LM/W	2.55	5PCS
PL6262-42W-CB	42W	620x620x9	605x605	100LM/W	2.55	5PCS
PL6060-25W-CB	25W	595x595x9	580x580	130LM/W	2.35	5PCS
PL6262-25W-CB	25W	620x620x9	605x605	130LM/W	2.55	5PCS
PL30120-25W-CB	25W	1195x295x9	1180x280	130LM/W	2.40	5PCS
PL60120-45W-CB	45W	1195x595x9	1180x580	130LM/W	5.30	2PCS

CCT 3000K 4000K 5000K 5700K Finish White

PL-DS Panel light




PL-DS panel adopts upper and lower frame structure design to reach an IP65 waterproof effect, it has a strong structure with 10mm thickness. Upper and lower 6063 Aluminium frames provide a great thermal management to ensure a long lifespan. Besides, it has high lumen SMD light source and PMMA LGP which offer a uniform light output and avoid yellow risky. External IP65 flicker free driver with waterproof DC connector UGR<19 available. Multiple installation ways: recessed, suspended and surface mounted.



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-15W-DS	15W	295x295x10	280x280	1275lm	1.05	10PCS
PL3060-20W-DS	20W	595x295x10	580x280	1800lm	1.79	5PCS
PL6060-36W-DS	36W	595x595x10	580x580	3600lm	3.16	4PCS
PL6262-36W-DS	36W	620x620x10	605x605	3600lm	3.43	4PCS
PL30120-36W-DS	36W	1195x295x10	1180x280	3600lm	3.31	4PCS
PL60120-60W-DS	60W	1195x595x10	1180x580	6300lm	6.37	2PCS
PL3030-10W-DS (UGR<19)	10W	295x295x10	280x280	950lm	1.05	10PCS
PL3060-15W-DS (UGR<19)	15W	595x295x10	580x280	1575lm	1.79	5PCS
PL6060-36W-DS (UGR<19)	36W	595x595x10	580x580	3960lm	3.16	4PCS
PL6262-36W-DS (UGR<19)	36W	620x620x10	605x605	3960lm	3.43	4PCS
PL30120-36W-DS (UGR<19)	36W	1195x295x10	1180x280	3960lm	3.31	4PCS

CCT 3000K 4000K 5000K 5700K Finish White

PL-CK Backlit panel light



PL-CK LED panel is a direct lighting with external driver, adopts SMD led with optical lens to provide a uniform light effect, no LGP design makes this panel more cost effective compared with normal edge-lit panel light, UGR<19 available, high efficiency available with 100lm/W, 120lm/W and 140lm/W. Recessed, suspended and surface mounted installation ways for choice.



CCT 3000K 4000K 5000K 5700K


Finish White

PL-CK Backlit panel light



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-CK	10W	295x295x32	280x280	100LM/W	0.65	10PCS/10PCS
PL3060-16W-CK	16W	595x295x32	580x280	100LM/W	1.01	5PCS/6PCS
PL6060-36W-CK	36W	595x595x32	580x580	100LM/W	1.56	5PCS/6PCS
PL6262-36W-CK	36W	620x620x32	605x605	100LM/W	1.98	5PCS/6PCS
PL30120-36W-CK	36W	1195x295x32	1180x280	100LM/W	1.72	5PCS/6PCS
PL60120-60W-CK	60W	1195x595x32	1180x580	100LM/W	3.20	4PCS/4PCS
PL3060-16W-CK	16W	595x295x32	580x280	120LM/W (110LM/W UGR<19)	1.01 1.17	5PCS/6PCS
PL6060-30W-CK	30W	595x595x32	580x580	120LM/W (110LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-30W-CK	30W	620x620x32	605x605	120LM/W (110LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-30W-CK	30W	1195x295x32	1180x280	120LM/W (110LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL6060-36W-CK	36W	595x595x32	580x580	120LM/W	1.56	5PCS/6PCS
PL6262-36W-CK	36W	620x620x32	605x605	120LM/W (110LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-36W-CK	36W	1195x295x32	1180x280	120LM/W	1.72	5PCS/6PCS
PL60120-50W-CK	50W	1195x595x32	1180x580	120LM/W (110LM/W UGR<19)	3.20 3.90	4PCS
PL60120-60W-CK	60W	1195x595x32	1180x580	120LM/W (110LM/W UGR<19)	3.20 3.90	4PCS
PL6060-30W-CK	30W	595x595x32	580x580	140LM/W (130LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-30W-CK	30W	620x620x32	605x605	140LM/W (130LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-30W-CK	30W	1195x295x32	1180x280	140LM/W (130LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL60120-50W-CK	50W	1195x595x32	1180x580	140LM/W (130LM/W UGR<19)	3.20 3.90	4PCS
PL6060-20W-CK NEW	20W	595x595x32	580x580	180LM/W (160LM/W UGR<19)	1.56 1.90	5PCS/6PCS
PL6262-20W-CK NEW	20W	620x620x32	605x605	180LM/W (160LM/W UGR<19)	1.98 2.35	5PCS/6PCS
PL30120-20W-CK NEW	20W	1195x295x32	1180x280	180LM/W (160LM/W UGR<19)	1.72 2.05	5PCS/6PCS
PL60120-40W-CK NEW	40W	1195x595x32	1180x580	180LM/W (160LM/W UGR<19)	3.20 3.90	4PCS

PL-CK5 Backlit panel light



PL-CK5 backlit panel is ultra slim design with external driver, adopts high quality SMD led with optical lens to provide a uniform light effect, high efficiency, no LGP design makes this panel more cost effective compared with normal edge-lit panel. UGR19, CCT switchable are available.


-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK5	36W	595x595x25	580x580	3800lm	1.82	5PCS/6PCS
PL6262-36W-CK5	36W	620x620x25	605x605	3800lm	1.91	5PCS/6PCS
PL-30120-36W-CK5	36W	1195x295x25	1180x280	3800lm	1.86	5PCS/6PCS

CCT 3000K 4000K 5700K

Finish White

PL-CK2 Backlit panel light



PL-CK2 panel is a patented frameless design with larger lighting area, direct lighting way makes full use of all light. Adopt high lumen 2835 SMD light source, the optical lens provides a uniform light output. The lamps are directly provided with pendants, which is convenient for installation. 2CCT/ 3CCT adjustable by slide switch is available.

-
-
-
-


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK2	36W	595x595x28	580x580	120LM/W	1.50	5PCS/6PCS
PL6262-36W-CK2	36W	620x620x28	605x605	120LM/W	1.82	5PCS/6PCS
PL30120-36W-CK2	36W	1195x295x28	1180x280	120LM/W	1.76	5PCS/6PCS
PL6060-25W-CK2	25W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-25W-CK2	25W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-25W-CK2	25W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS
PL6060-28W-CK2	28W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-28W-CK2	28W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-28W-CK2	28W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS

CCT 3000K 4000K 5000K 5700K

Finish White


PL-CK8

Backlit Panel light



PL-CK8 panel is backlit panel with frameless design. Adopt high lumen 2835 SMD light source, CRI>80 and CRI>90 for option, CCT switch is available. Recessed, suspended and surface mounted installation ways for choice.

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-CK8-18W	18W	595x295x50	580x280	1800lm	1.80	5PCS
PL6060-CK8-36W	36W	595x595x50	580x580	3600lm	2.70	5PCS
PL30120-CK8-36W	36W	1195x295x50	1180x280	3600lm	3.20	5PCS

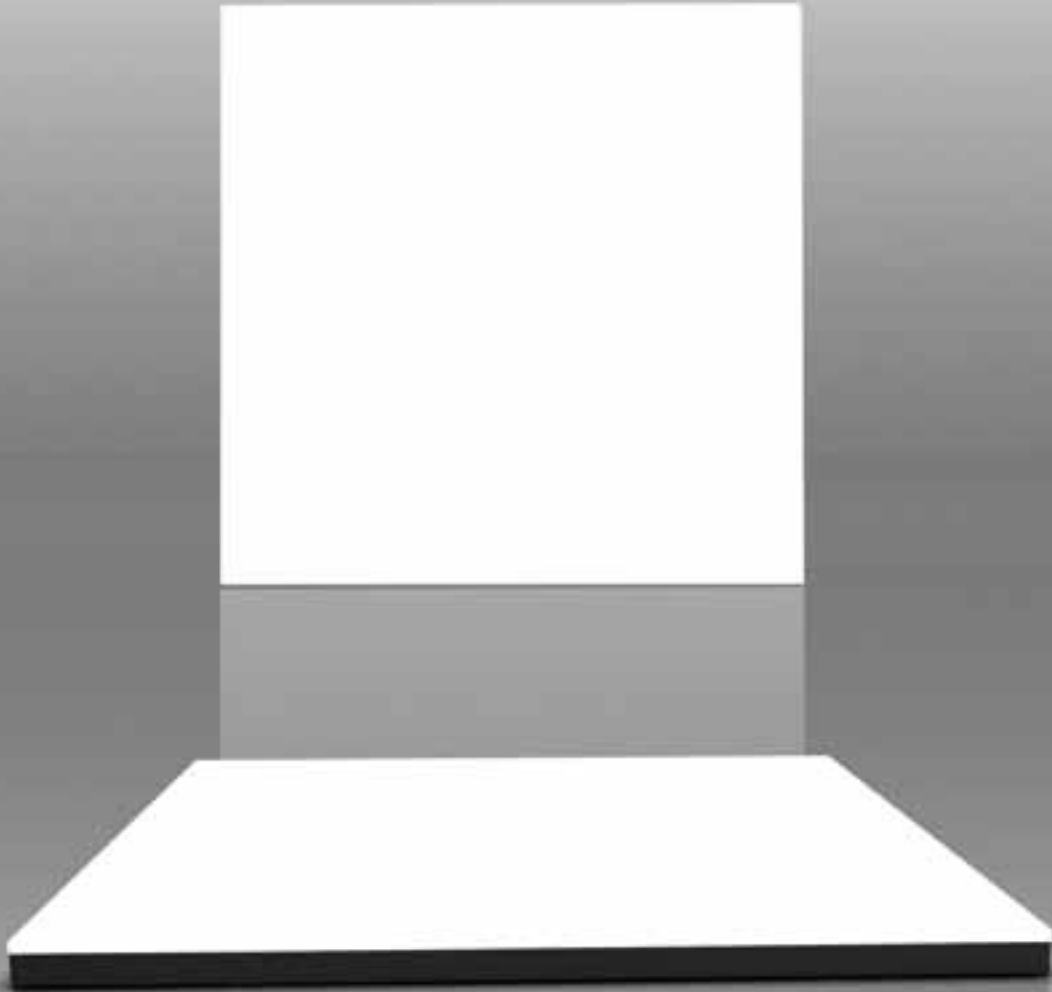


PL-CK8
FRAMELESS PANEL

LED Panel light

PL-G5B

Panel light



PL-G5B panel is 10mm thickness panel, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers.It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G5B	10W	295x295x10	280x280	1210lm	0.76	10PCS
PL3060-20W-G5B	20W	595x295x10	580x280	2530lm	1.37	5PCS
PL6060-28W-G5B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G5B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G5B	28W	620x620x10	605x605	3696lm	2.80	5PCS
PL6262-33W-G5B	33W	620x620x10	605x605	4356lm	2.80	5PCS
PL30120-28W-G5B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G5B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G5B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS

CCT

3000K

4000K

5000K


5700K

Finish

White

PL-G6B

Panel light



PL-G6B is UGR<19 LED panel with 10mm thickness, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. It also can meet the medical light source COI <3.3. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. The ultra slim profile fits seamlessly into any work place. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G6B	10W	295x295x10	280x280	1210lm	0.76	10PCS
PL3060-20W-G6B	20W	595x295x10	580x280	2530lm	1.37	5PCS
PL6060-28W-G6B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G6B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G6B	28W	620x620x10	605x605	3696lm	2.80	5PCS
PL6262-33W-G6B	33W	620x620x10	605x605	4356lm	2.80	5PCS
PL30120-28W-G6B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G6B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G6B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS

CCT

3000K

4000K

5000K

5700K


Finish

White



PL-CC


Panel light



PL-CC panel is 14.3mm thickness panel with external driver, adopts high lumen LED chips with CRI>80, PMMA LGP produces uniform and comfortable light. Stronger frame makes better heat dissipation than common panels. The lighting area fits seamlessly with the ceiling. Recessed installation with clips make it suitable for more kinds of ceiling perfectly.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-33W-CC	33W	595x595x14.3	580x580	3530lm	2.50	5PCS
PL6060-42W-CC	42W	595x595x14.3	580x580	4370lm	2.50	5PCS
PL30120-33W-CC	33W	1195x295x14.3	1180x280	3400lm	2.65	5PCS
PL30120-42W-CC	42W	1195x295x14.3	1180x280	4210lm	2.65	5PCS

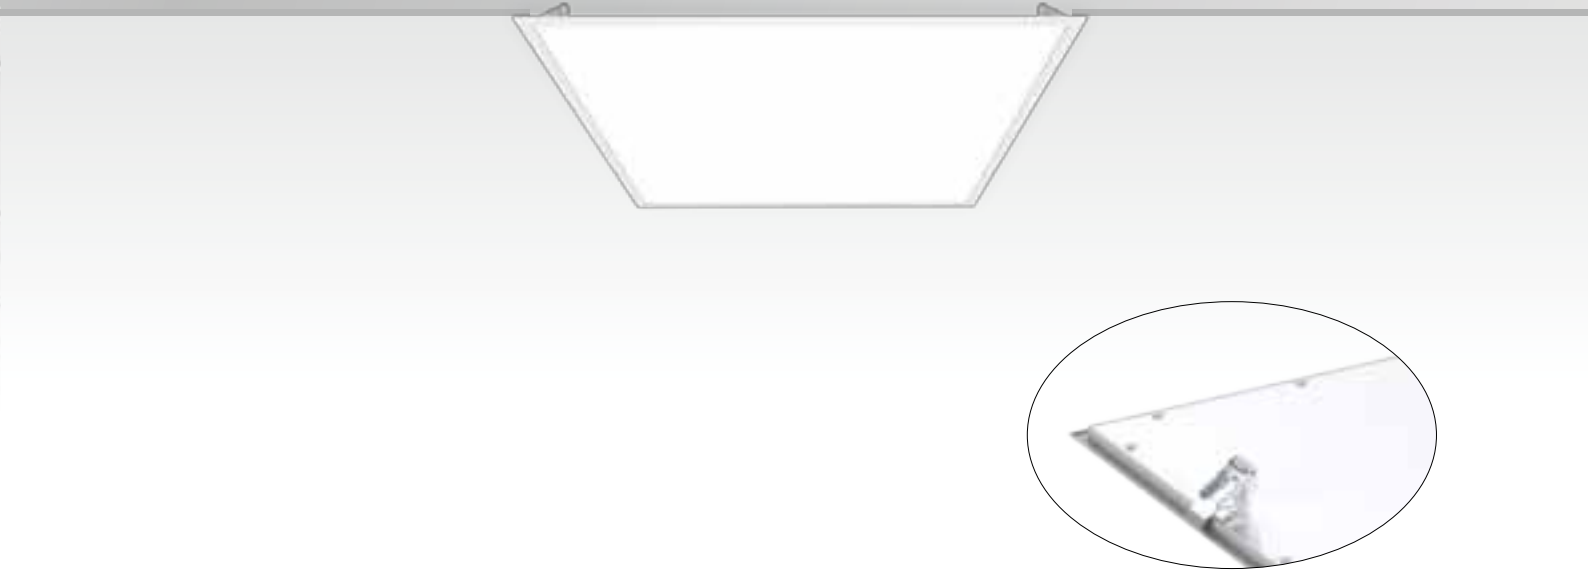

PL-CD

Panel light




PL-CD panel light is 8.5mm thickness frame with fixed spring design panel light with external driver, adopts high lumen LED chips with CRI>80, special frame design provides excellent thermal management. Recessed installation with clips makes it suitable for more kinds of ceiling.


-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-33W-CD	33W	595x595x35.5	580x580	3460lm	2.35	5PCS
PL30120-33W-CD	33W	1195x295x35.5	1180x280	3400lm	2.40	5PCS

PL-DP Panel light




PL-DP is smart panel light , which is comprised of driver, smart control module and induction module. Connect Bluetooth between the mobile phone and the lamp, then the mobile phone APP can control the lamp. Users can adjust the brightness and color temperature of lamps according to their own needs. Automatic light supplement can also be realized by photo sensor. The PIR sensor is used to switch the lamp, and the indicator light is used to display the on/ off state of the photosensitive sensor and PIR sensor of the Lamp.

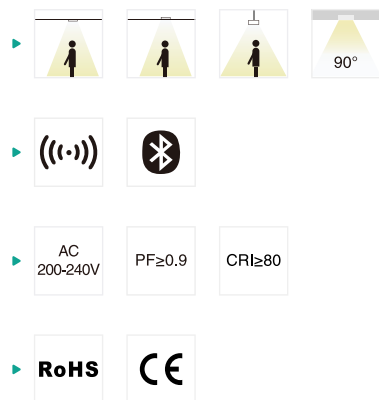

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-40W-DP	40W	595x595x8.5	580x580	4000lm	3.10	4PCS
PL6262-40W-DP	40W	620x620x8.5	605x605	4000lm	3.50	4PCS
PL30120-40W-DP	40W	1195x295x8.5	1180x280	4000lm	3.10	4PCS

CCT 2700K~6500K

Finish White

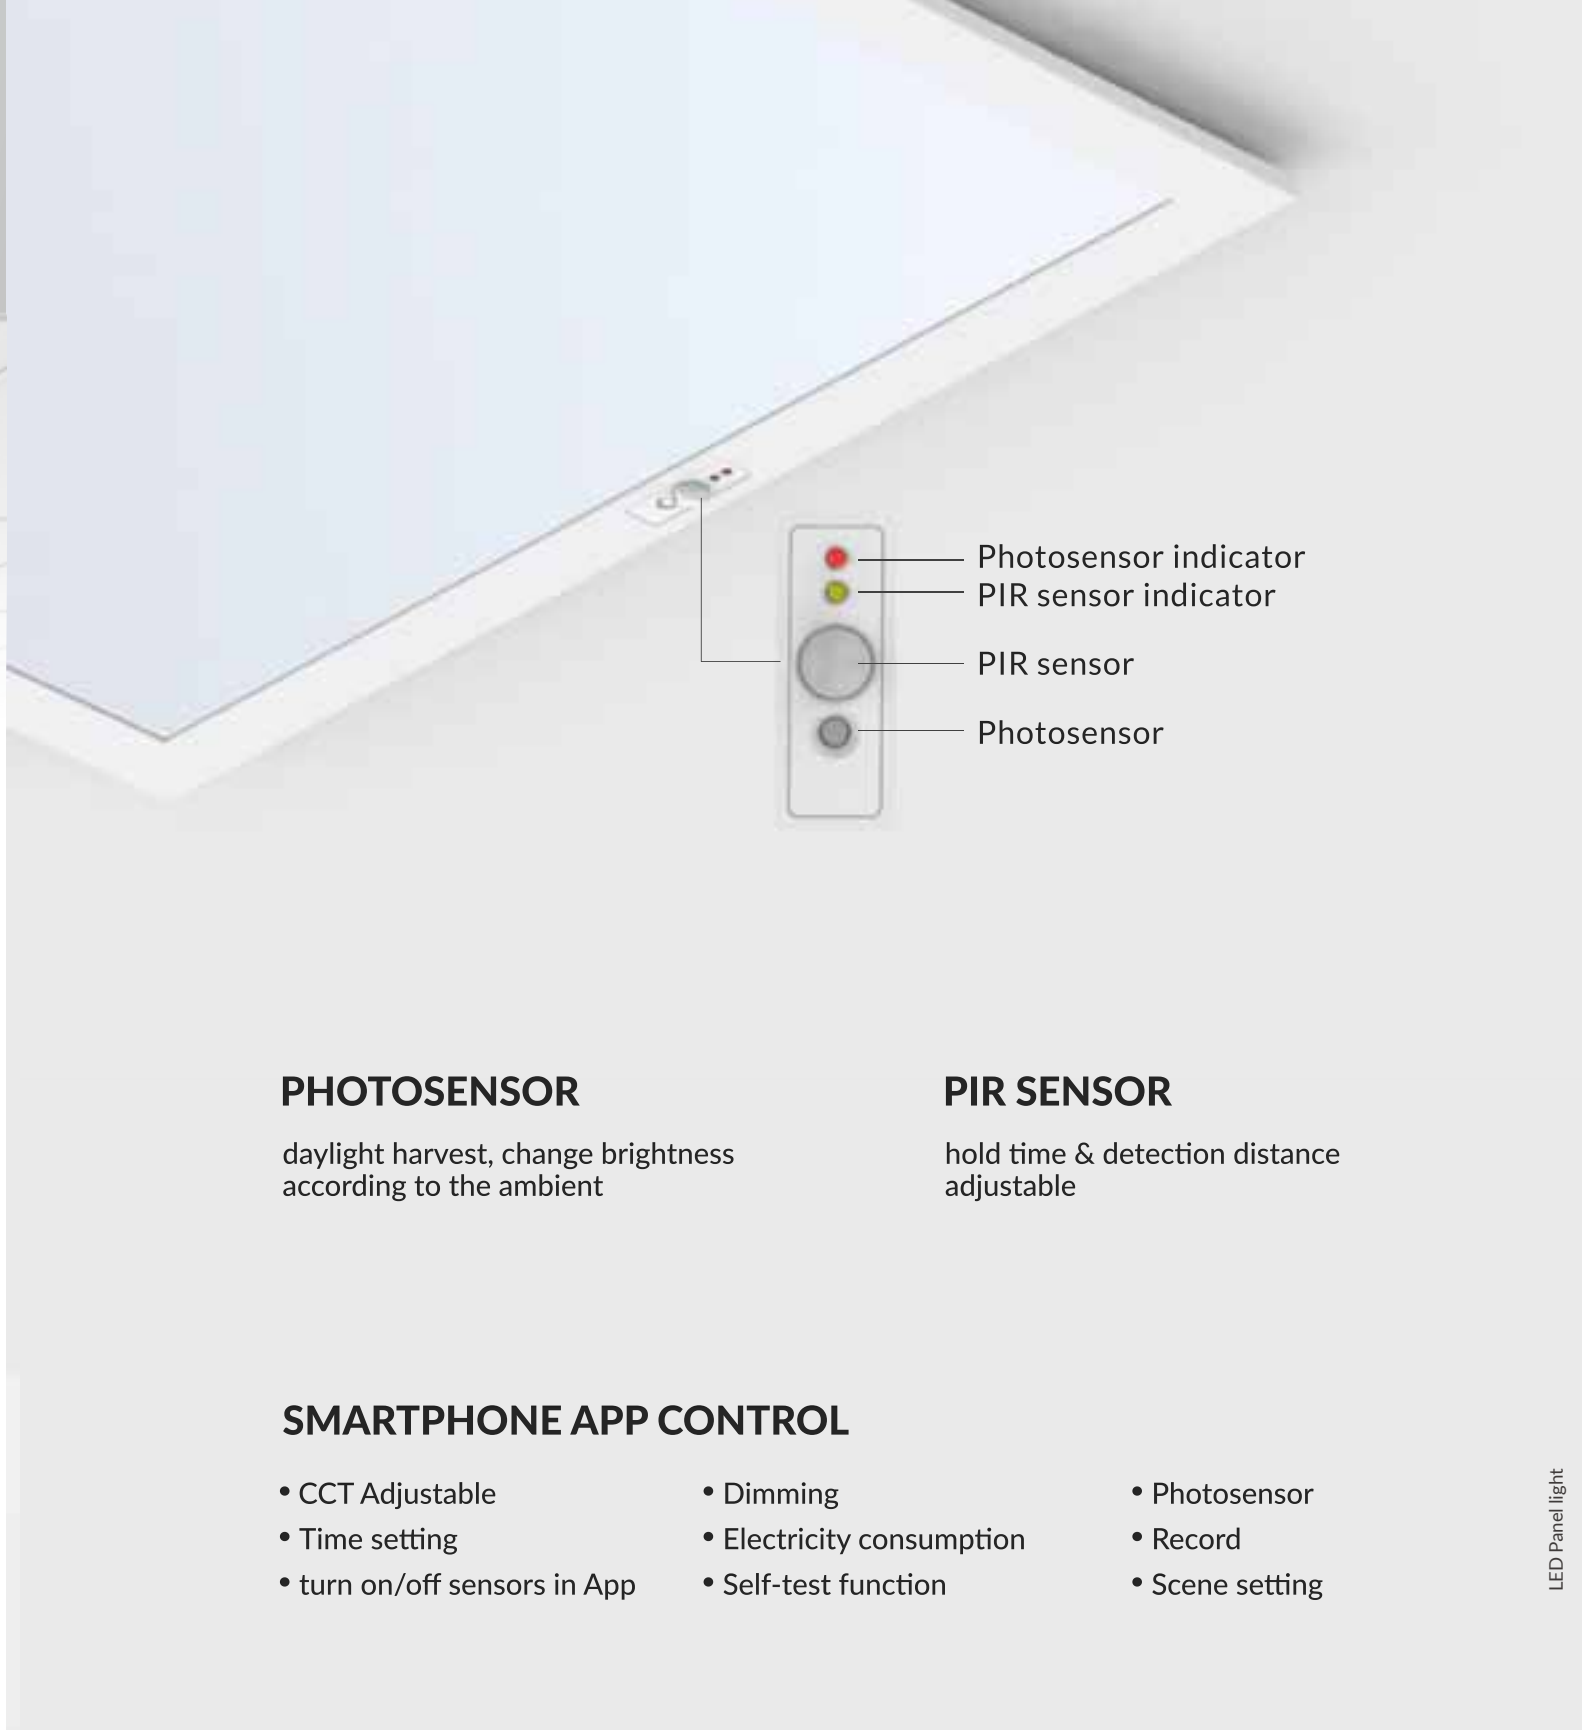

PHOTOSENSOR

daylight harvest, change brightness according to the ambient

PIR SENSOR

hold time & detection distance adjustable


SMARTPHONE APP CONTROL

- CCT Adjustable
- Time setting
- turn on/off sensors in App
- Dimming
- Electricity consumption
- Self-test function
- Photosensor
- Record
- Scene setting

STANDBY POWER<0.5W



PL-DE Panel light




PL-DE is a new grill design with UGR<19.COI (Cyanosis Observation Index) compliant.Air slot available.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-DE	13W	292x592x48	/	1365lm	2.60	4PCS
PL3012-DE	28W	1192x292x48	/	2940lm	2.99	4PCS
PL4012-DE	28W	1192x392x48	/	2940lm	2.73	2PCS
PL6060-DE	28W	592x592x48	/	2940lm	5.41	4PCS
PL3015-DE	40W	1492x292x48	/	4200lm	3.73	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

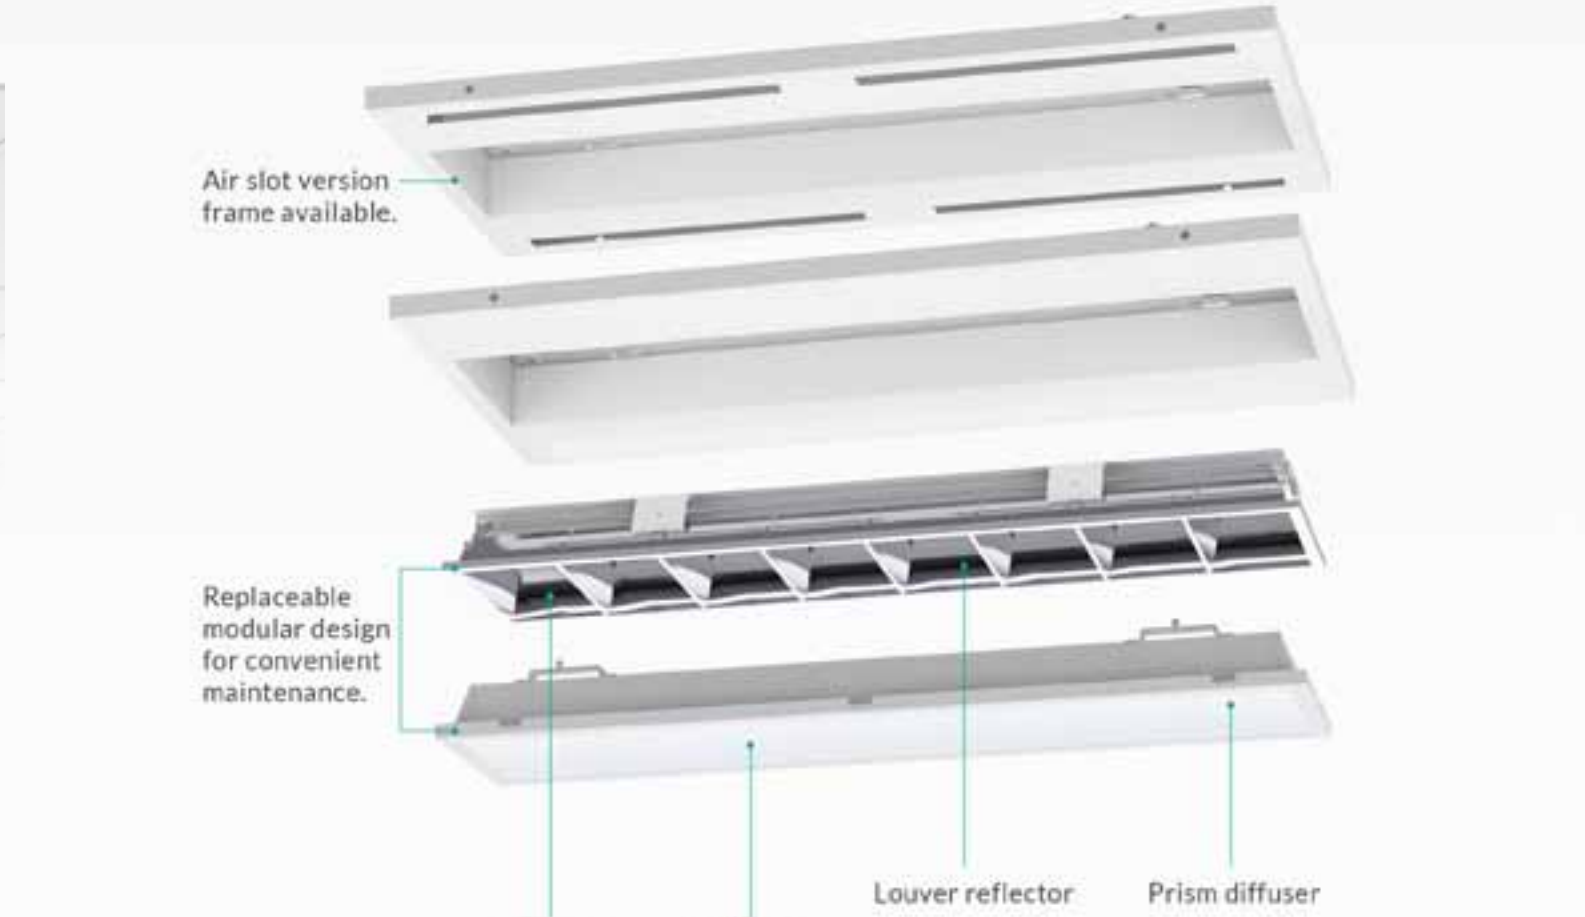


PL-DE MODULAR DESIGN LED PANEL

Replaceable modular design for convenient maintenance

GL-AA

Panel light




GL-AA backlit troffer is anti-glare design, the compact and seamless splicing make it a great looking .It adopts anti-glare prism plate to reach UGR<19,could be interchangeable CCT (3000K+4000K+5700K) with slide switch.

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-36W-AA	36W	595x595x49	580x580	3700lm	2.60	5PCS
GL30120-36W-AA	36W	1195x295x49	1180x280	3700lm	2.99	5PCS
GL6262-36W-AA	36W	620x620x49	605x605	3700lm	2.73	5PCS
GL60120-60W-AA	60W	1195x595x49	1180x580	6500lm	5.41	2PCS


GL-N

Troffer light




GL-N is troffer light with external driver, adopts secondary optical designed and special treatment diffuser to achieve more uniform and softer light, providing more comfortable visual experience. Luminous efficiency 105lm/W. Powder spraying surface treatment is employed in the lamp fixture which makes the lamp corrosion resistant. Designed for grid ceiling commercial applications.


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
GL6060-33W-N	33W	595x595x54	580x580	3850lm	2.50	5PCS
GL30120-33W-N	33W	1195x295x54	1180x280	3850lm	2.70	5PCS

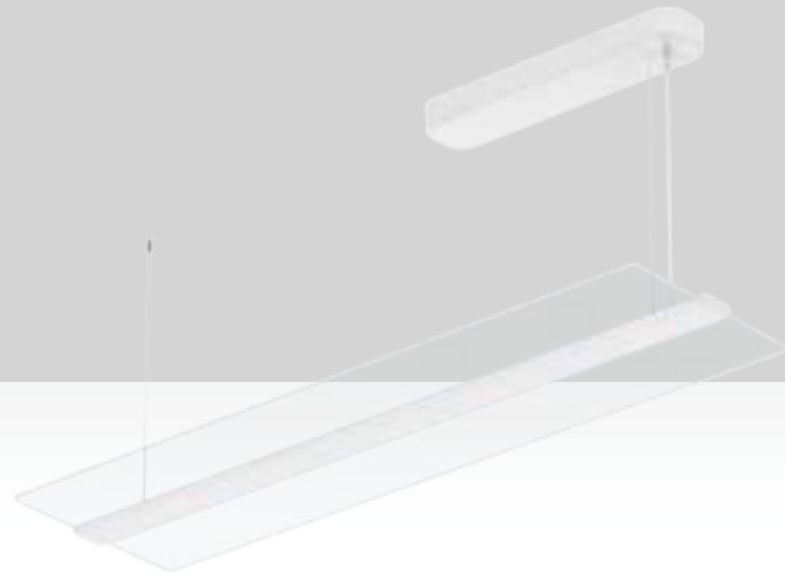

PL-DF Panel light




This panel light is a frameless, transparent and 360 degree lighting design, which provides a great visual aesthetic feeling. Adopt high lumen SMD light source, the 4mm transparent PMMA LGP makes a uniform, soft lighting output and reaches anti-glare UGR<19. 6063 aluminum heat sink makes an excellent thermal management. Magnetic mounting box can also save much time for installation.

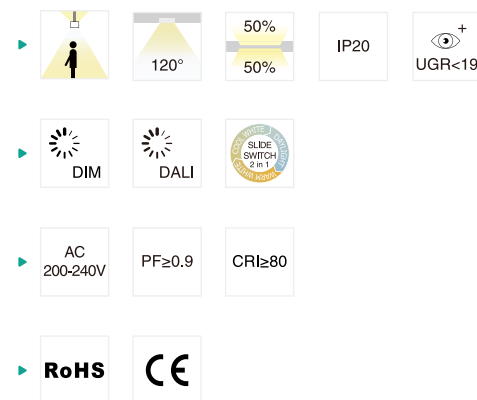


Code	Watt	Size(AxBxCxDxExFxGmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL35120-40W-DF	40W	1200x350x1500x19x422x480x43	4800lm	4.50	2PCS
PL35120-40W-DF-D	40W	1200x350x1500x19x422x480x43	4800lm	4.50	2PCS
PL35120-60W-DF	60W	1200x350x1500x19x422x480x43	7300lm	4.50	2PCS

CCT 3000K 4000K 5700K


Finish White

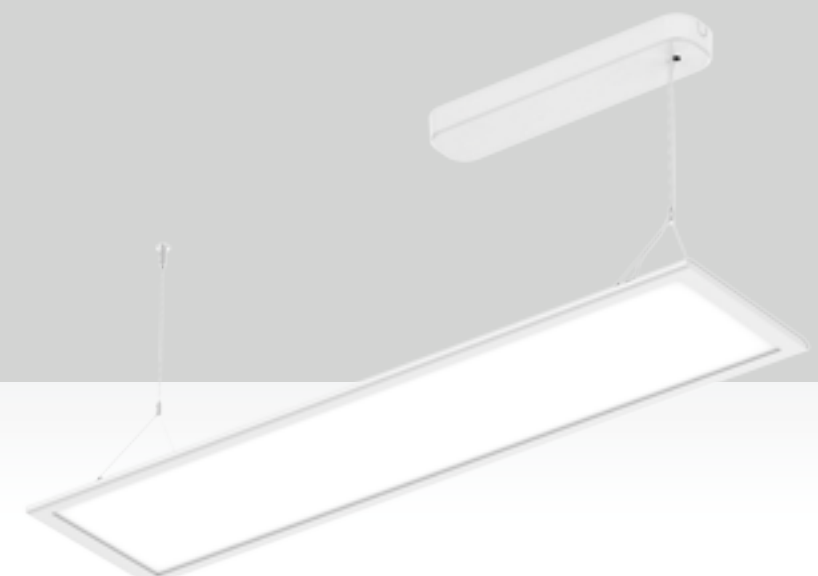

PL-DB Panel light

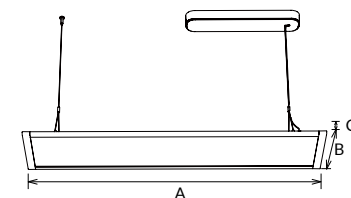

PL-DB panel light is an Up & down emitting panel with external driver, novel design without any screw make it a special and good looking panel. Besides, it is an anti-glare UGR<19 design without Prism plate, this is a new tendency for high end market. Magnetic mounting box can also save much time for installation, Triac dim and DALI dimming options.

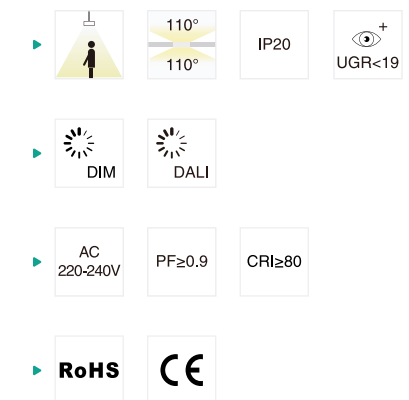


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL30120-30W-DB	30W	1200x300x16.5	3060lm	3.76	2PCS
PL30120-40W-DB	40W	1200x300x16.5	4000lm	3.76	2PCS
PL30120-50W-DB	50W	1200x300x16.5	4950lm	3.76	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White



PL-DG Panel light



PL-DG pendant panel light is a translucent and 35% up & 65% down lighting design, which can be used in many applications as a decorative light. It adopts high quality diffuser and 3.0T PMMA light guide plate which provide a high transmittance rate and uniform light. Steel wire mounted on the edge of frame is more convenient and much safer. 300mm, 400mm, 500mm, 600mm size options. Interchangeable CCT (3000/4000/5700K) with slide switch is available.

-
-
-
-

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-DG	18W	Ø300x11.5	1820lm	1.25	5PCS
PL4012-35W-DG	35W	Ø400x11.5	3605lm	1.75	4PCS
PL5012-40W-DG	40W	Ø500x11.5	4120lm	2.25	4PCS
PL6012-60W-DG	60W	Ø600x11.5	6210lm	3.15	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White



PL-DG PENDANT LED ROUND PANEL

UP & DOWN translucent
lighting 35%:65%



Slim transparent
body design



PMMA LGP



Translucent lighting area can
offer a great decorative
effect



Suspension




Surface mounted




Recessed

PL-DR Backlit panel light

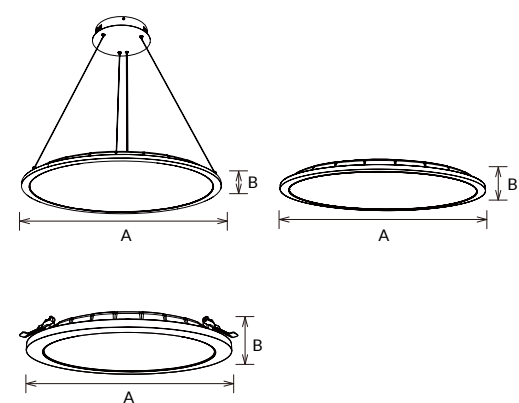

PL-DR is a direct lighting panel with appearance design patent. Adopts 2835 SMD light source and PMMA lens which generated a great uniform light output. For structure, it has a super slim lamp body and supports embedded surface mounted and suspended installation way. 400mm, 500mm, 600mm sizes for embedded surface mounted version, 300mm, 400mm, 500mm, 600mm for suspended version.

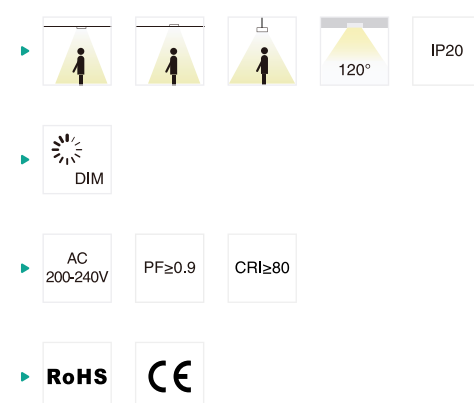


CCT — 3000K 4000K 5000K 5700K

Finish — White


Code	Watt	Size(AxBmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL300-18W-DR	18W	Ø300x13.8	/	1980lm	1.44	4PCS
PL400-25W-DR	25W	Ø400x13.8	Ø200-240	2750lm	1.92	4PCS
PL400-35W-DR	35W	Ø400x13.8	Ø200-240	4000lm	1.92	4PCS
PL500-30W-DR	30W	Ø500x13.8	Ø200-240	3960lm	2.50	4PCS
PL500-35W-DR	35W	Ø500x13.8	Ø200-240	4300lm	2.50	4PCS
PL600-35W-DR	35W	Ø600x13.8	Ø200-240	4300lm	3.26	2PCS
PL600-45W-DR	45W	Ø600x13.8	Ø200-240	5950lm	3.26	2PCS
PL600-55W-DR	55W	Ø600x13.8	Ø200-240	6650lm	3.26	2PCS



PL-W Panel light




PL-W LED pendant decorative light with high quality diffuser and 3T PMMA LGP. 300mm, 400mm, 500mm, 600mm and 780mm diameter for options. Various installation ways include suspended, surface mounted and recessed.

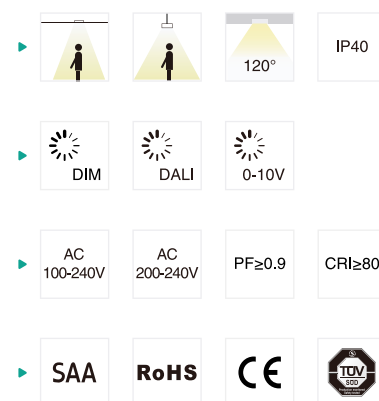


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-W	18W	Ø300x12	1560lm	2.50	5PCS
PL4012-25W-W	25W	Ø400x12	2070lm	3.10	4PCS
PL4012-35W-W	35W	Ø400x12	2900lm	3.10	4PCS
PL5012-30W-W	30W	Ø500x12	2520lm	4.20	4PCS
PL5012-35W-W	35W	Ø500x12	2900lm	4.20	4PCS
PL6012-35W-W	35W	Ø600x12	3040lm	4.34	2PCS
PL6012-45W-W	45W	Ø600x12	3600lm	4.34	2PCS
PL8012-60W-W	60W	Ø780x20	5430lm	6.10	2PCS
PL8012-80W-W	80W	Ø780x20	7460lm	6.90	2PCS

CCT 3000K 4000K 5000K 5700K


Finish White

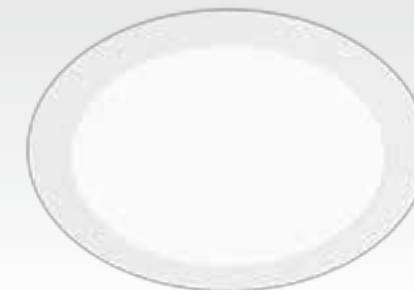

PL-DD Panel light

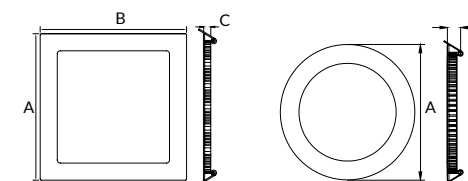


PL-DD is small size panel with complete diameter options. 2835SMD LED chip and PMMA LGP offer a great light transmittance and light output. Adopt die-casting aluminum frame which provides a great thermal management. External driver comes with triac dim, it shares great popularity by perfect dimming range and great compatibility with worldwide dimmers. The ultra slim profile fits perfectly for all working places.

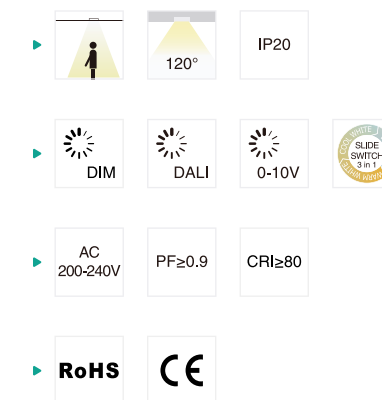

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL1212-7W-DD	7W	120x120x21	105x105	580lm	0.24	36PCS
PL1515-9W-DD	9W	146x146x21	127x127	810lm	0.28	24PCS
PL1717-12W-DD	12W	171x171x21	155x155	1070lm	0.34	20PCS
PL2222-18W-DD	18W	224x224x21	205x205	1580lm	0.52	12PCS
PL3030-24W-DD	24W	300x300x21	277x277	2500lm	0.88	12PCS
PL1221-7W-DD	7W	Ø120x21	Ø108-113	580lm	0.20	36PCS
PL1521-9W-DD	9W	Ø145x21	Ø127-133	810lm	0.24	24PCS
PL1721-12W-DD	12W	Ø170x21	Ø157-162	1050lm	0.29	20PCS
PL2021-15W-DD	15W	Ø200*21	Ø177-182	1470lm	0.35	12PCS
PL2221-18W-DD	18W	Ø224x21	Ø205-212	1680lm	0.42	12PCS
PL2421-22W-DD	22W	Ø238*21	Ø224-228	2150lm	0.50	12PCS
PL3021-24W-DD	24W	Ø300x21	Ø282-288	2500lm	0.71	12PCS


CCT 3000K 4000K 5000K 5700K 6500K

Finish White

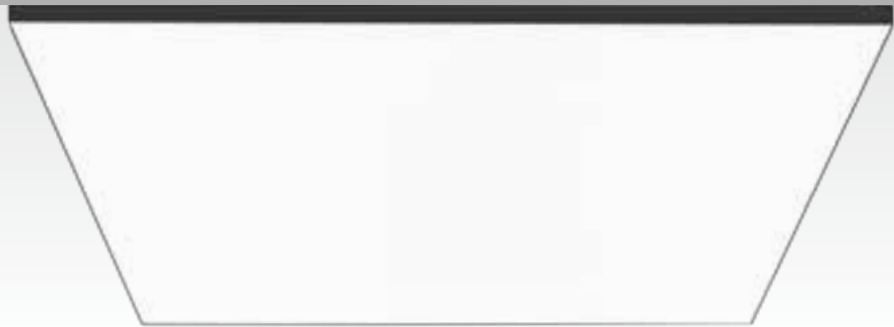

PL-EA

Panel light



PL-EA is a big size panel with simple and elegant design. CRI>90, adopting high quality SMD led and secondary light distribution design to provide uniform light output. Fireproof B1 grade soft film as luminous cover and 0.5mm thickness backboard make this panel looks very reliable.

-
-
-
-

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL120120-60W-EA	60W	1200x1200x110	4800lm	11	1PCS
PL120240-120W-EA	120W	1200x2400x110	9600lm	21	1PCS
PL120300-180W-EA	180W	1200x3000x110	14400lm	27	1PCS
PL150150-80W-EA	80W	1500x1500x110	6400lm	17	1PCS
PL150300-240W-EA	240W	1500x3000x110	19200lm	34	1PCS

CCT

3000K

4000K

5000K

5700K


Finish

Black

Installation accessories

Suspension kit

Surface mounted kit

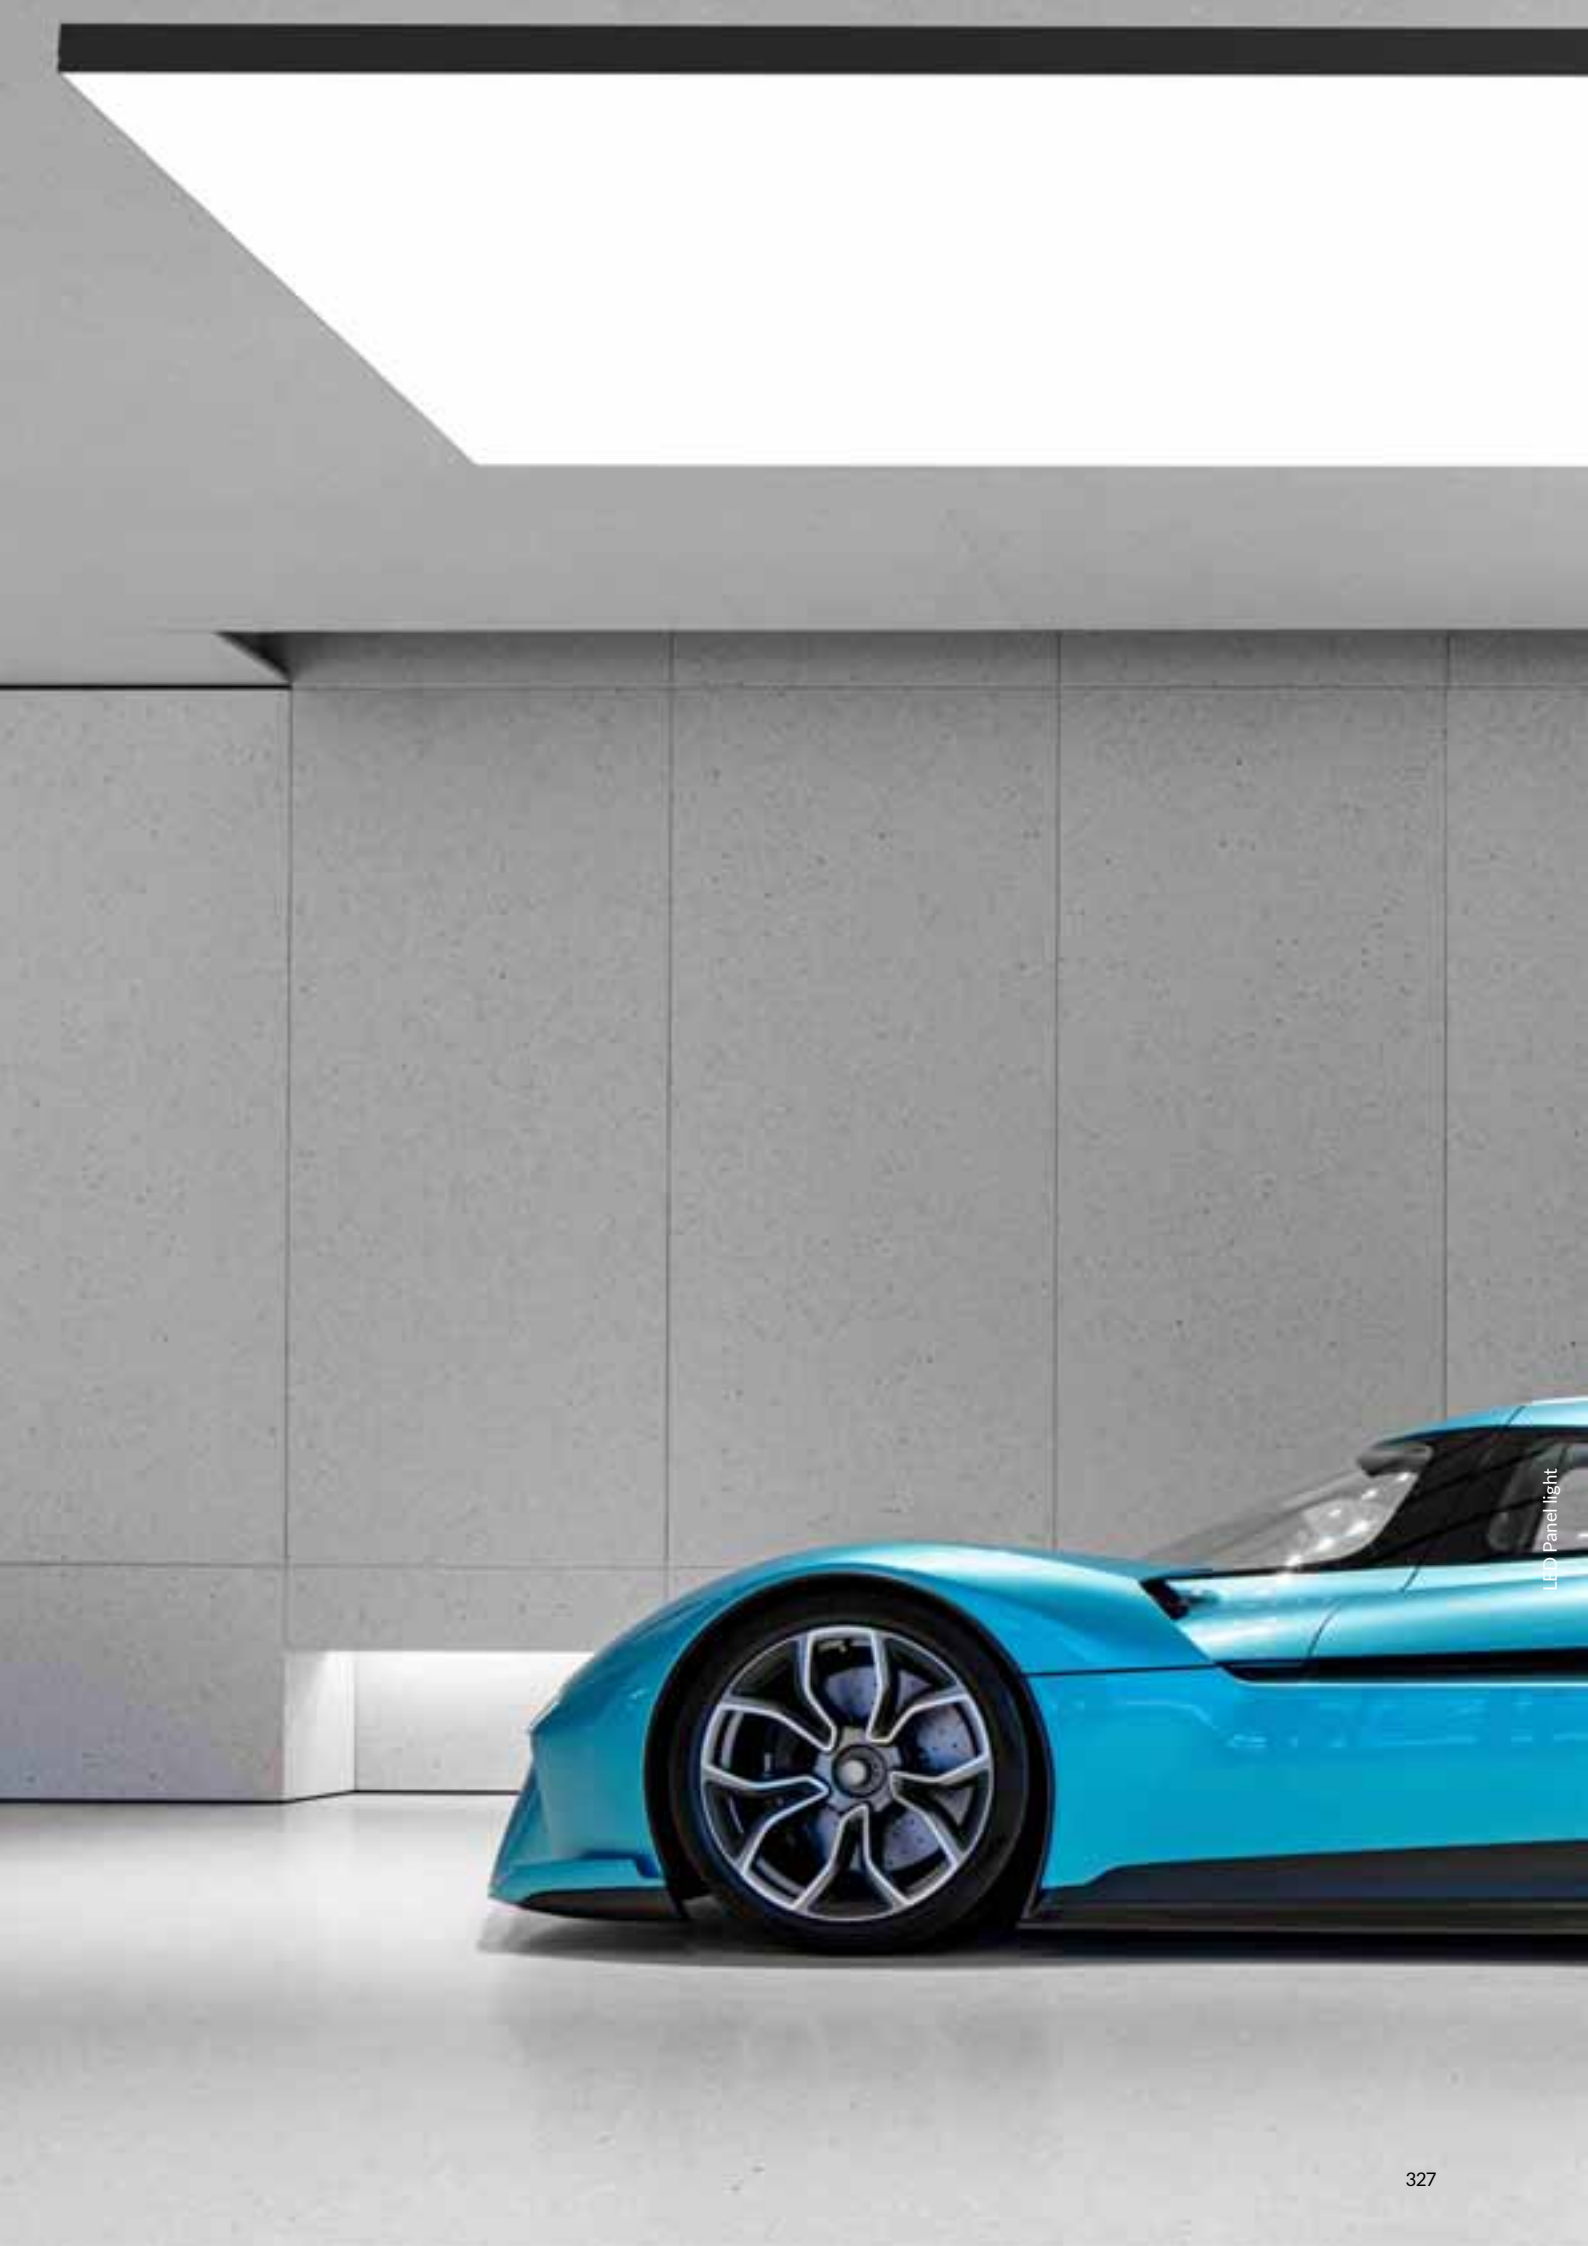

Assembled surface mounted frame



CF01



CF13




DIY surface mounted frame



CF04



CF11

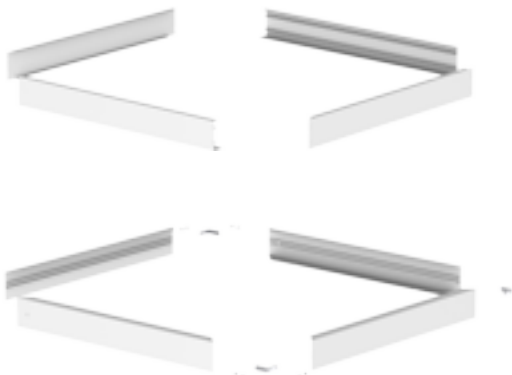

Assembled embedded mounted frame



RF01



RF02



Suspending Kits



Recessed Installation Clips




Integrated Recessed Installation Clips






OL02 LED freestanding luminaire

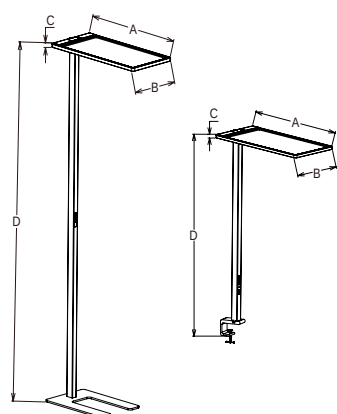

This OL02 freestanding lamp is composed of three parts: flat lamp body, lamp pole and lamp base. With a precise optical design (UGR<14, up 75% & down 25% lighting), it can ensure a more uniform and more comfortable lighting effect. Lamp Pole with: Plug, touchable 0-10V dimmer, light sensor and PIR sensor module.

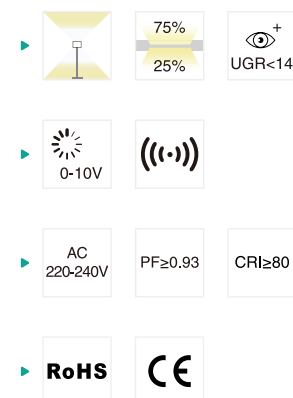


Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL02/B-75W-DOS	75W	720x340x21.5x1925	8200lm	Flat lamp body:2.70 Lamp pole:3.10 Lamp base:6.70	6PCS 6PCS 2x3PCS
OL02C/D-75W-DOS	75W	720x340x21.5x1288	8200lm	Flat lamp body:2.70 Lamp pole:3.00	6PCS 6PCS

CCT 3000K~5700K

Finish White Black

- Indirect lighting and direct lighting (500~700LUX on the desk)
- PMMA LGP with Prismatic diffuser to achieve UGR<14 ideal for office lighting.

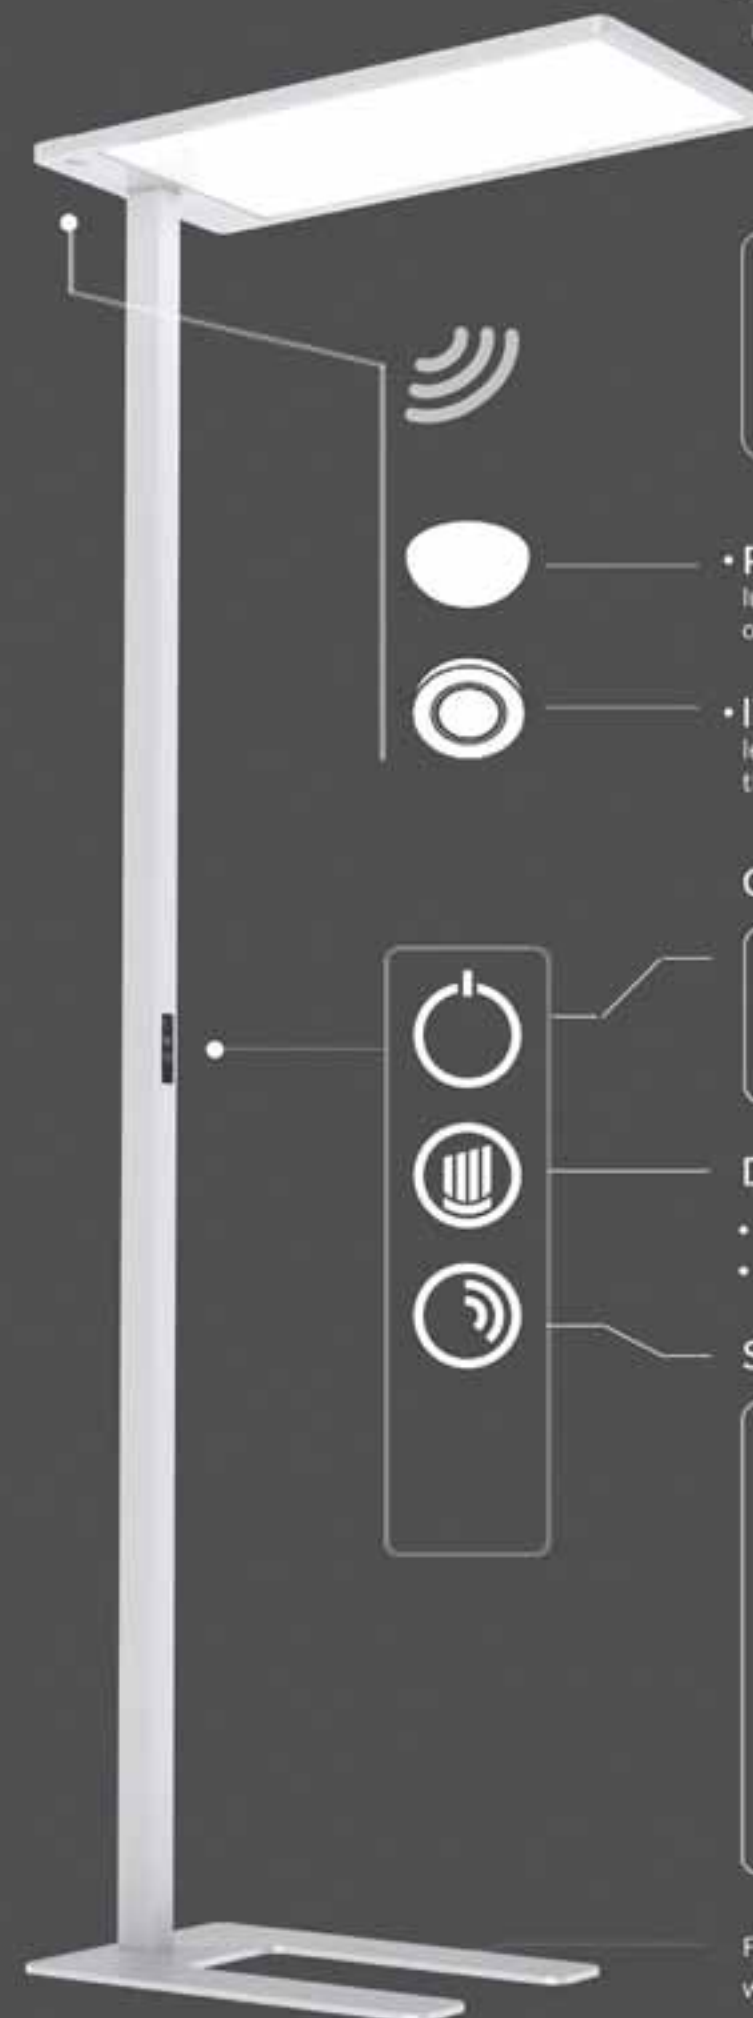

STATUS



• **PIR sensor** detector automatically switches the luminaire on and then switches it off when there is no one in the room.

• **light sensor** continuously measures the illuminance level on the desk and dims the light itself depending on the amount of available daylight and artificial lighting.

ON/OFF



Dimming button

- Short press in 1s, brightness will increase/ decrease 5%
- Long press brightness will increase/ decrease continually


Sensor




Flat lamp base with reliable stability/saving space and widely work with office furniture



OL06 LED freestanding luminaire

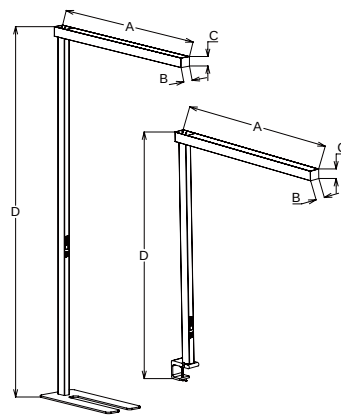

This OL06 free-standing luminaire is composed of three parts. OL06A is for floor standing, OL06B is for desk installation. OL06C is for floor standing with smart control, OL06D is for desk installation with smart control. Direct and indirect optic design, UGR<16, up 75% & down 25% lighting, up to 125lm/W high light efficiency. 0-10V dimmer, light sensor, PIR sensor module and USB connector are available. The configuration of the luminaire is triggered by pressing a button. The lighting control modules are interchangeable, which is very suitable for modern office environments.

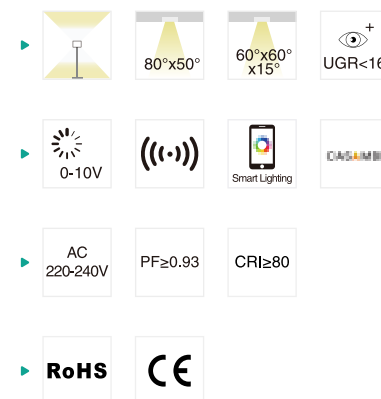


Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL06A-80W-DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
OL06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
OL06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS

CCT 3000K 4000K 5000K 5700K


Finish White



OL07 LED freestanding luminaire

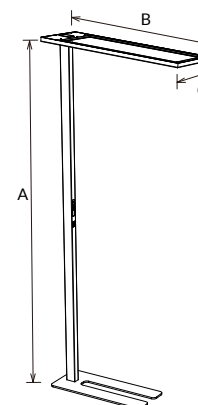

OL07 LED freestanding luminaire with professional version and intelligent version. The professional version could be PIR sensor and daylight sensor. The intelligent version could be CCT changeable and dim by CANSAMBI. 120 degree beam angle and UGR<16 could provide uniform lighting performance.

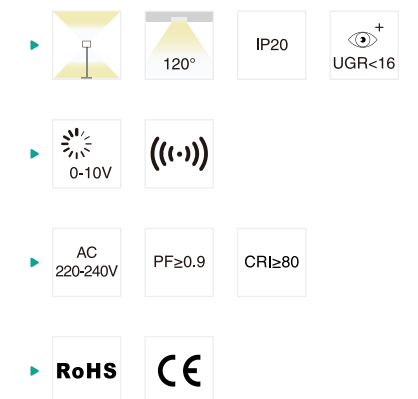


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
OL07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
OL07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
OL07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
OL07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
OL07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS

CCT 3000K 4000K 5000K

Finish White



OL01 LED freestanding luminaire

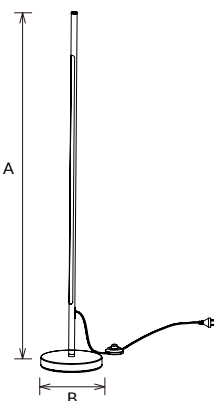

OL01 is a freestanding light combines modern industrial style, the unique shape and simple design perfectly fit the aesthetic concept of modern society. It adopts Tuya WIFI+2.4G intelligent technology, create various atmospheres, can switch to different lighting scenes according to your needs. Supporting both smart phone control and remote control, make it very convenient and easy control for different users. The slender body, plug and play, makes it convenient for different position.

- ▶ 120°
- ▶ IP20
- ▶ AC 200-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL01-15W -WG	15W	1600x182	1400lm	Base:2.2 Lamp Body:0.6	6PCS 18PCS

CCT 3000K~5700K

Finish White Black



LED freestanding luminaire